


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.11.13.

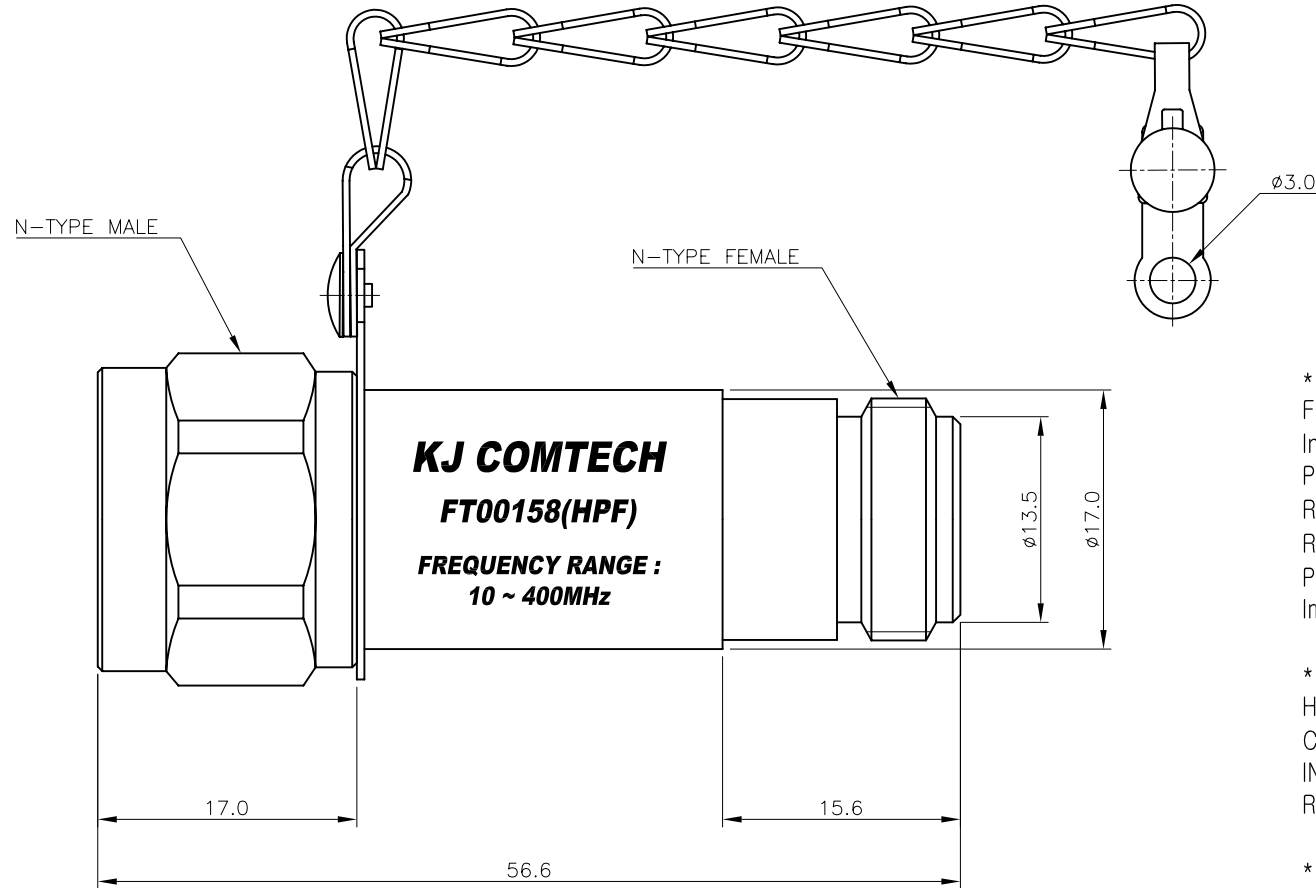

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 10.0 ~ 400.0MHz
Insertion Loss (Max.) : 1dB
Pass Band Ripple : 0.5dB
Return Loss (Min.) : 18dB
Rejection Point(Min) : 18dB@5MHz, 60dB@1MHz
Power Handling (Max.) : 1.0W
Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : MBsBD (Nickel)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON
RoHS COMPLIANT

*** OTHER SPECIFICATIONS**

MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	±0.3	2009. 11. 13.					
	Angle	APPROVED BY	J.H.YOUN				
MATERIAL	±1°	CHECKED BY	K.I.CHO			TITLE	HIGH PASS FILTER
		DRAWN BY	I.C.KIM				
FINISH	MBsBD	SCALE	UNIT		A4	DWG NO.	FT00158-7/1
Nickel Plate		2/1	mm			REVISION	I R