
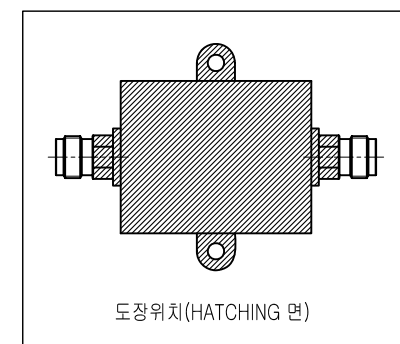
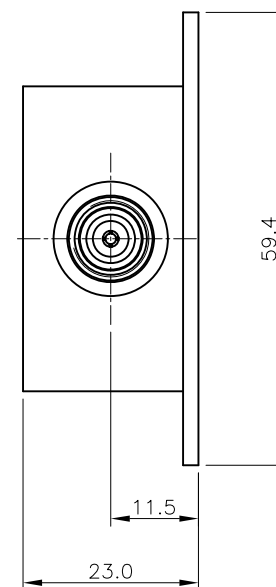


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2012.01.19.
2	Changed Connector Type, Frequency Range	I.C.KIM	J.H.YOUN	2012.08.18.

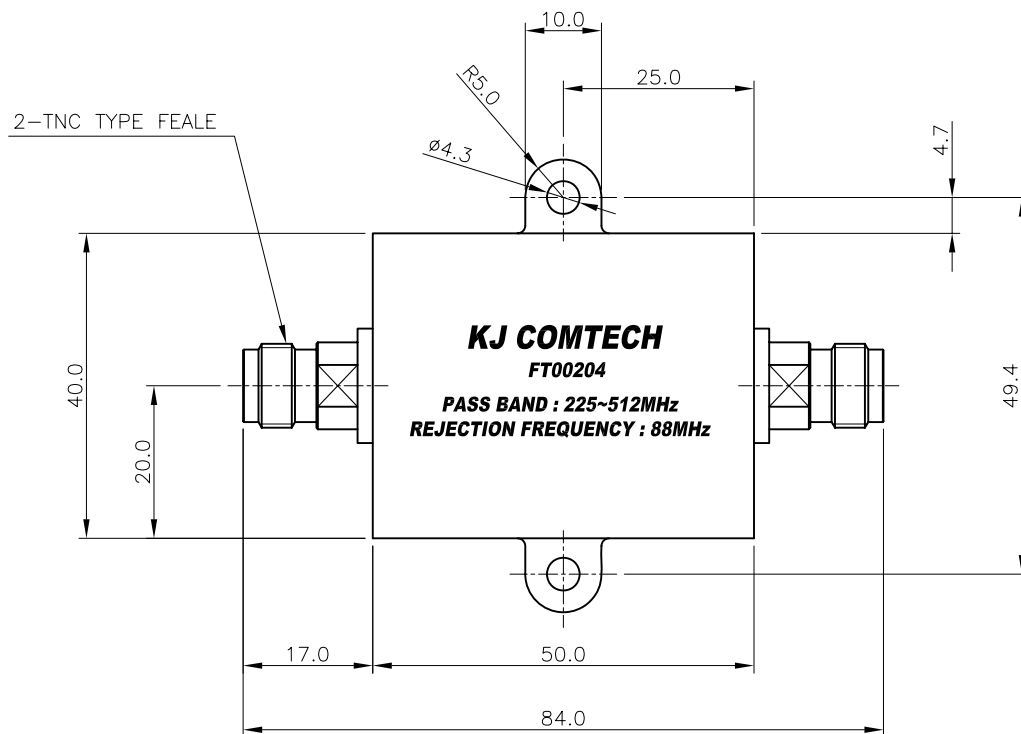

* ELECTRICAL SPECIFICATIONS
 PASS BAND FREQUENCY : 225~512MHz
 PASS BAND INSERTION LOSS : 0.5dB
 REJECTION VALUE (Min.) : -25dBc (@88MHz)
 V.S.W.R (Max.) : 1.5 : 1
 INPUT POWER (Max.) : 20W CW
 OPERATION TEMPERATURE : -30~70°

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Ni Plate)
 CONNECTORS PINS : Female / Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON
 PAINTING : DIC-582(BLACK)
 TEXT : WHITE

* ENVIRONMENTAL SPECIFICATIONS
 IP65
 MIL-STD-810

TOLERANCE	Decimal	DATE			 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY				
MATERIAL	±0.3	J.H.YOUN			TITLE	HIGH PASS FILTER
	±1°	I.C.KIM				
A6061 T6	CHECKED BY	J.H.YOUN			A4	DWG NO. FT00204-8/2
	DRAWN BY	I.C.KIM				
FINISH	SCALE	UNIT			REVISION	SHEET
DIC-582(BLACK)	1/1	mm			2	1 of 1