


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2004.10.14.

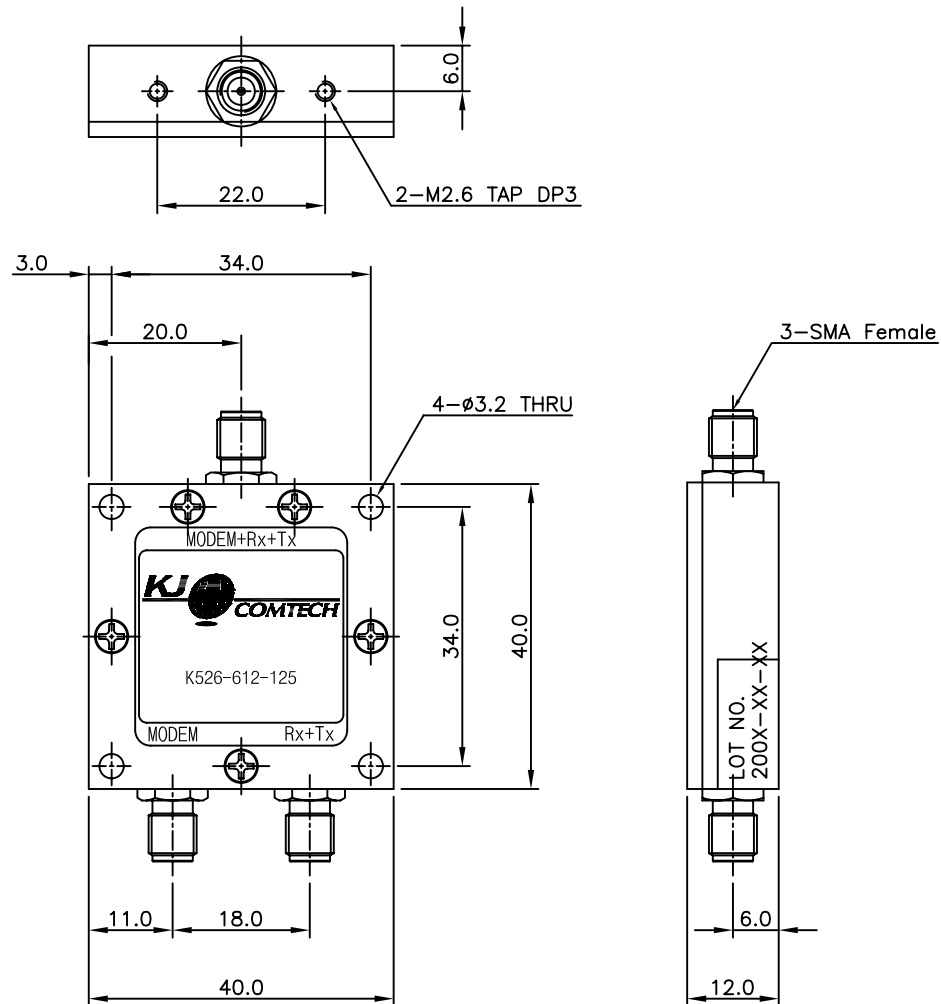

* ELECTRICAL SPECIFICATIONS

Parameter	Specification	
Input port	MODEM+Rx+Tx	
Output port	MODEM	Rx+Tx
Frequency Range(MHz)	250~360	1940~1960
Loss(Max)	1.5dB	1dB~2dB
Passband SWR(Max)	1	1
Ripple(Max)	1dB(P-P)	0.5dB(P-P)
Attenuation(Min)		-25dB
Diplexer	@2130~2150	
Isolation(Min)	60dB	

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

구코드: DX00066-7/1

TOLERANCE	Decimal	DATE 2004. 10. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY	I.C.KIM	KJ COMTECH CO.,LTD. TITLE DIPLEXER
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	Yellow Chromate	SCALE	UNIT	A4 DWG NO. FT00281-7/1 REVISION I R SHEET 1 of 1
		1/1	mm	