
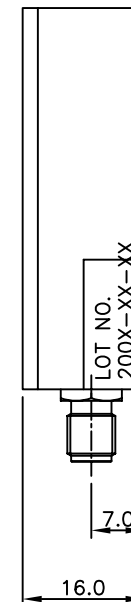


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2004.11.10.

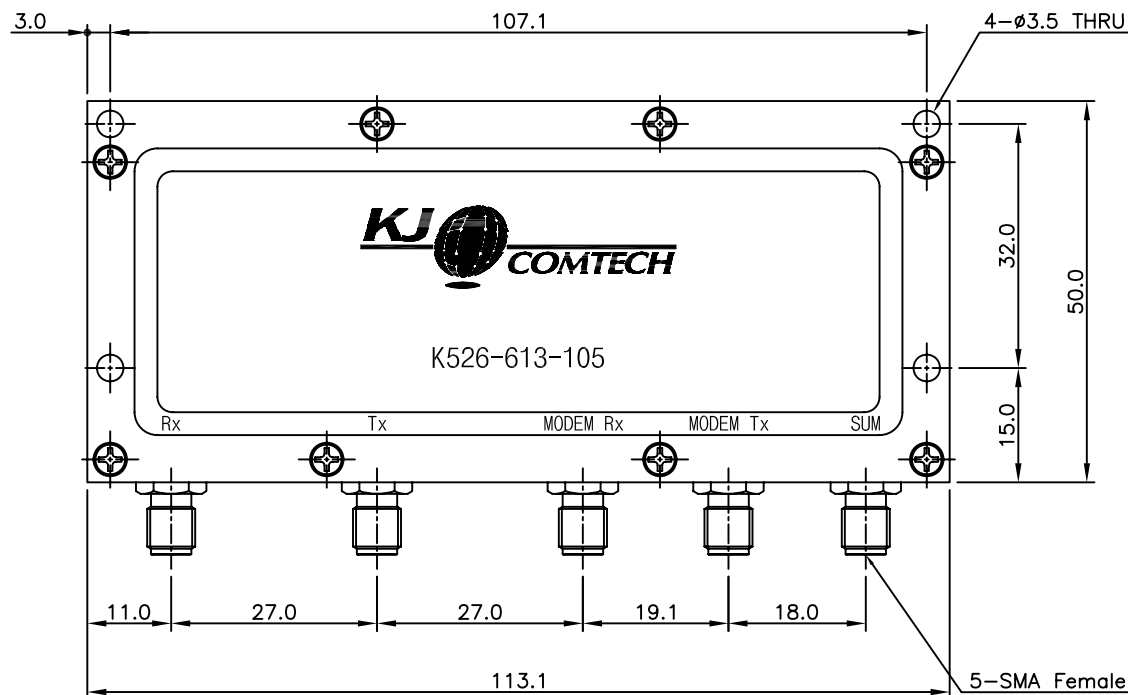

* ELECTRICAL SPECIFICATIONS

Parameters	Specification			
	Rx	Tx	MODEM Rx	MODEM Tx
Port Number	Rx	Tx	Rx	Tx
Frequency Range (MHz)	1940~1960	2130~2150	300~380	300~380
Insertion Loss (Max)	1.5dB	1.5dB	4dB	4dB
TV SWR (Max)	1.3 : 1	1.3 : 1	1.3 : 1	1.3 : 1
Tx/Rx Loss	0.3dB	0.3dB	0.3dB	0.3dB
Band Ripple (Max)	(P-P)	(P-P)	(P-P)	(P-P)
Attenuation	25/60 Tx/MODEM	25 Rx	50/20 Rx,Tx/MODEM Tx	50/20 Rx,Tx/MODEM Rx

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

구코드: DX00072-7/1

TOLERANCE	Decimal	DATE 2004. 11. 10.		
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	I.C.KIM	KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
		DRAWN BY	K.I.CHO	
FINISH	Yellow Chromate	SCALE	1/1	HYBRID MULTIPLEXER DWG NO. FT00287-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	