


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2005.01.26.

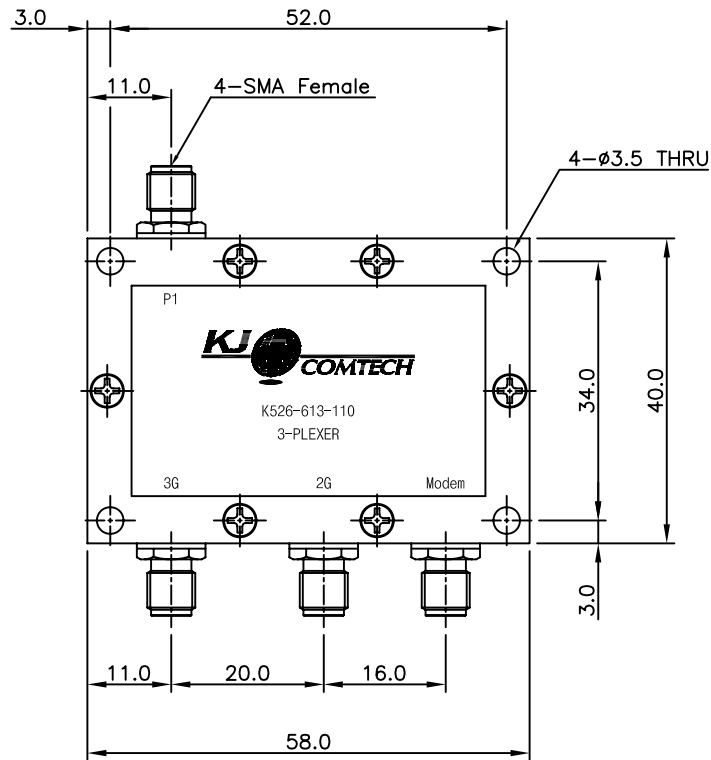

* ELECTRICAL SPECIFICATIONS

Parameters	Specification		
Input Port	P1		
Port Number	3G	2G	Modem
Frequency Range (MHz)	1930~2160	815~900	300~370
Loss(Max)	1dB	1dB	1dB
V.S.W.R(Max)	1.3 : 1	1.3 : 1	1.3 : 1
Pass band	0.2dB (P-P)	0.2dB (P-P)	
* Ripple(Max)			
Isolation(Min)	50dB		
Impedance	50Ω		
Operating Temperature	-10~70°C		

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)


CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

구코드: DX00077-7/1

TOLERANCE	Decimal	DATE 2005. 01. 26.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	I.C.KIM	TITLE TRIPLEXER
		DRAWN BY	K.I.CHO	
FINISH	Yellow Chromate	SCALE	1/1	DWG NO. FT00293-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	



A4