


	Date	Version No.	1.0
	Customer	KJ Code	FT00338-6/1


* Test Data(Graph)

1. LOW


Insertion Loss

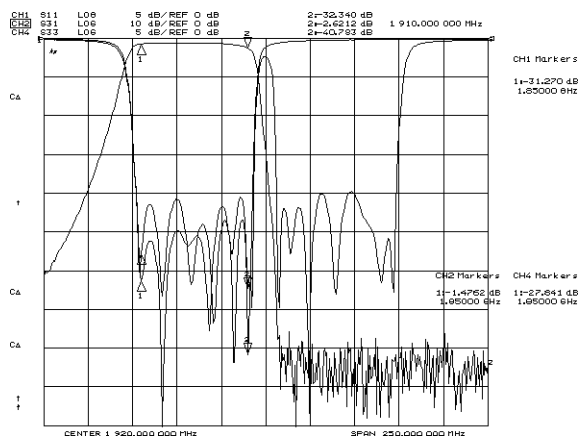


VSWR

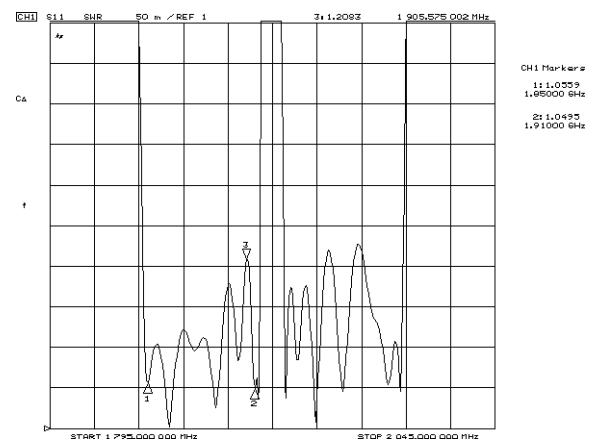

Attenuation1930~1990MHz]

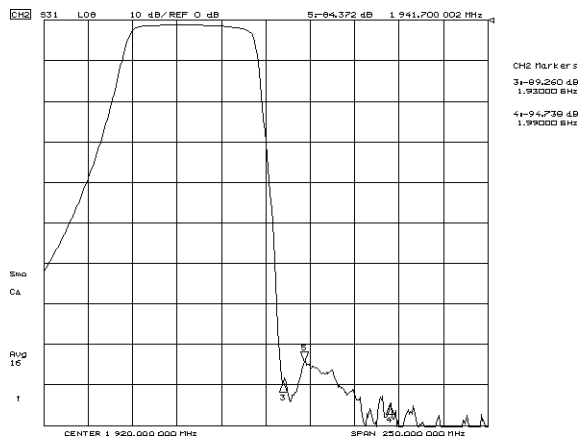


Isolation[1850~1910MHz]

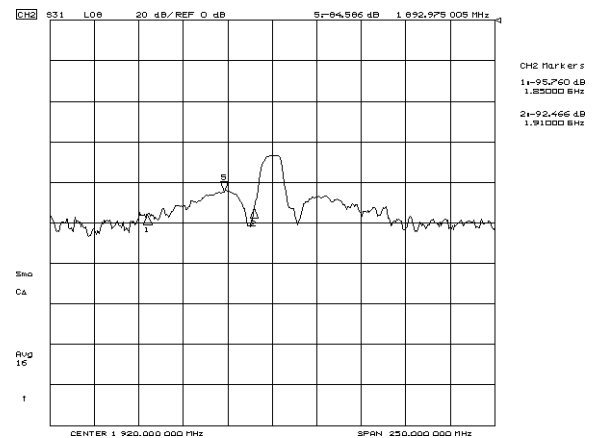


	Date	Version No.	1.0
	Customer	KJ Code	FT00338-6/1

Rejection[DC~1700MHz]

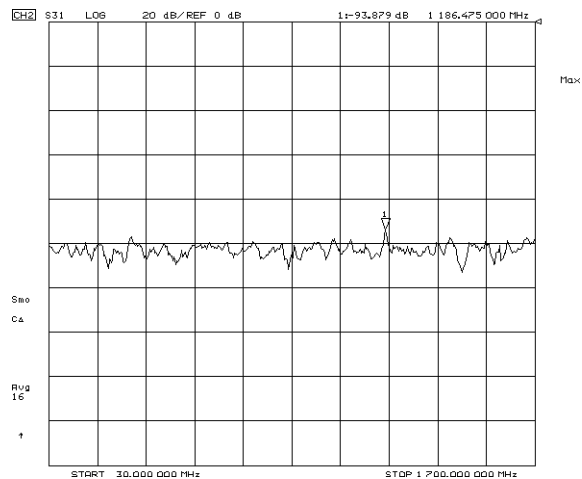


Rejection[2.35~2.55GHz]

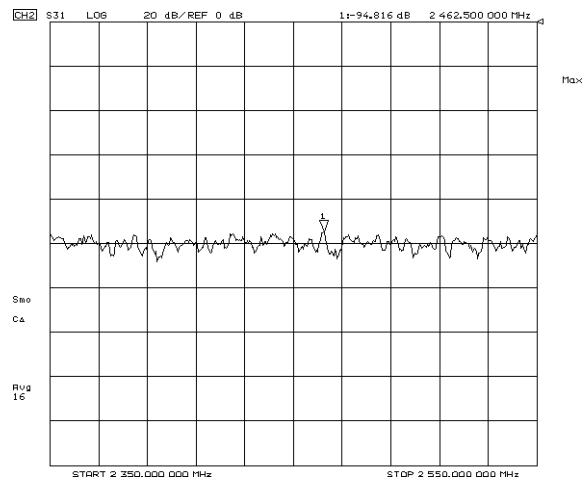


	Date	Version No.	1.0
	Customer	KJ Code	FT00338-6/1

2. HIGH


Insertion Loss

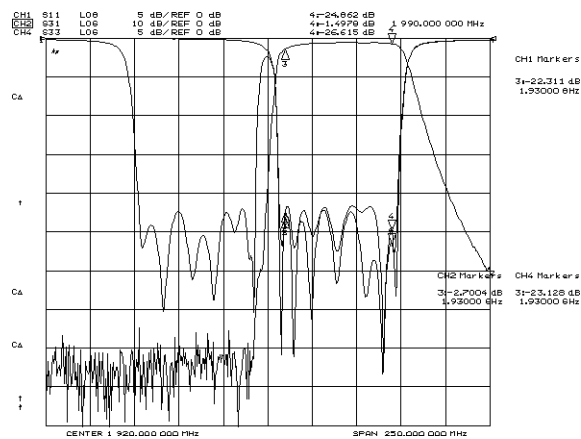


VSWR

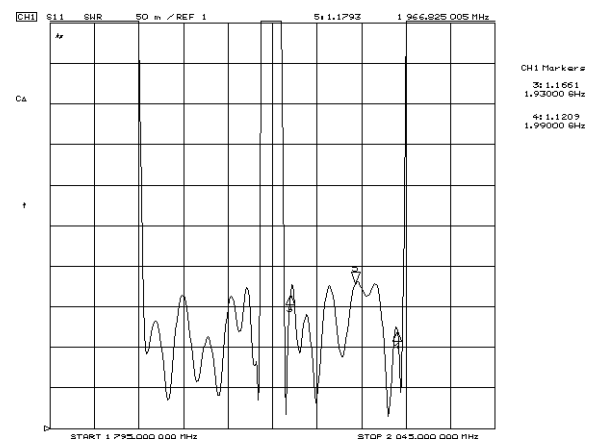

Attenuation[1850~1910MHz]

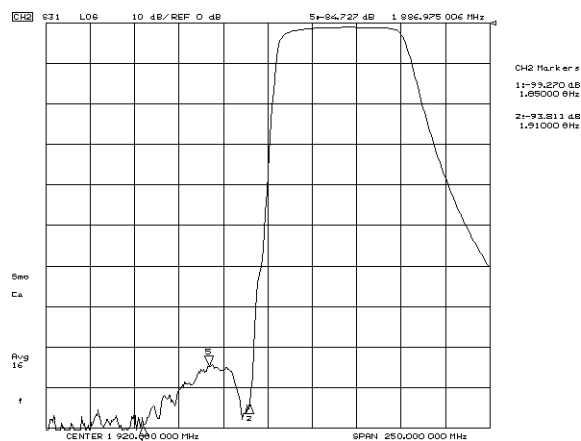


Isolation[1930~1990MHz]

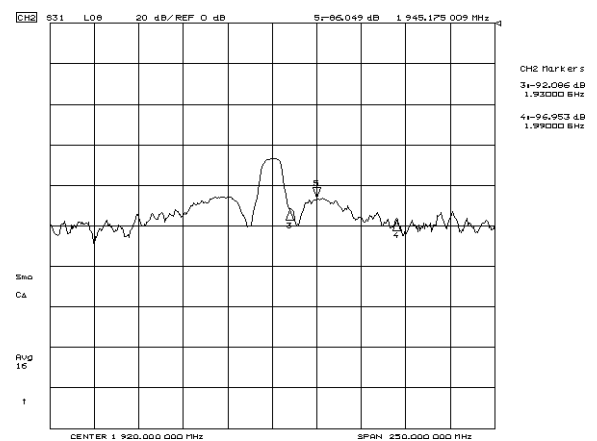

	Date	Version No.	1.0
	Customer	KJ Code	FT00338-6/1

Rejection[DC~1700MHz]

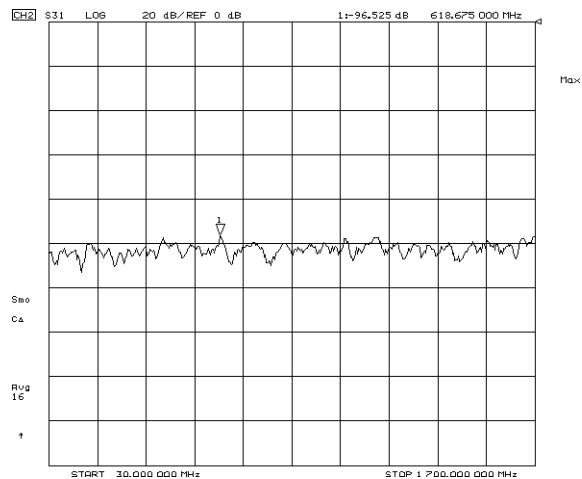

Rejection[2.35~2.55GHz]

