


	Date	Version No.	1.0
	Customer	KJ Code	FT00350-6/1

#Test Data (Graph)


1. Temperature Data (Normal)

1.1. LB: 4400.0~4550.0MHz


Insertion Loss # Return Loss

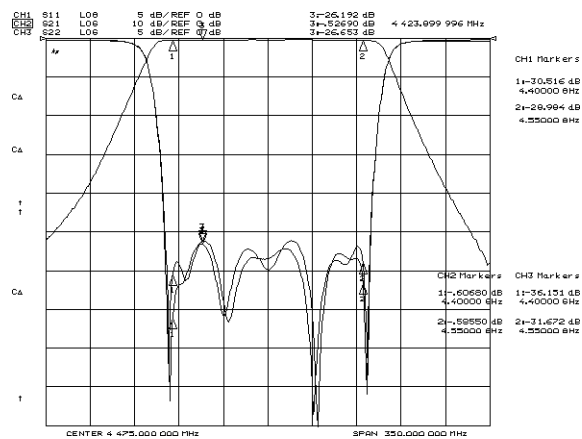

Pass Band Ripple

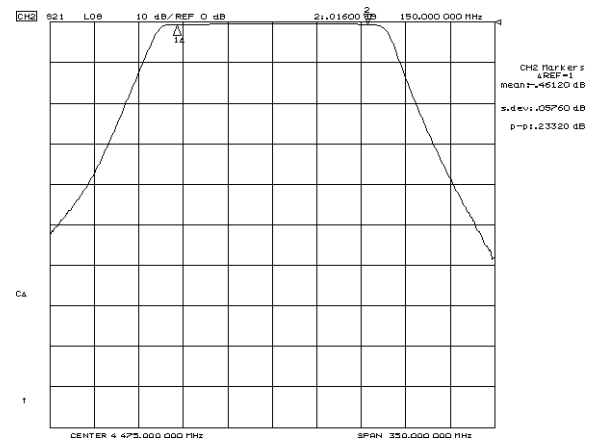


Rejection [<4250.0MHz / >4700.0MHz]

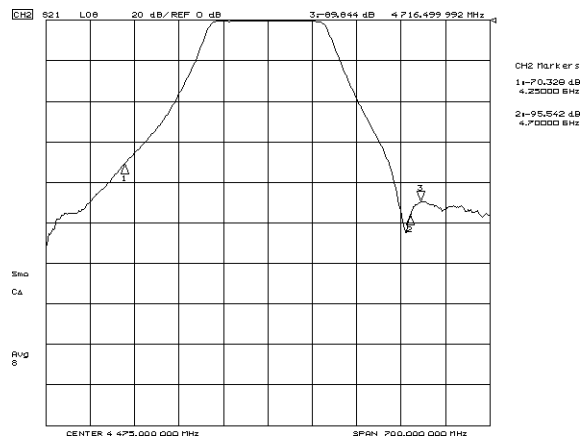


	Date	Version No.	1.0
	Customer	KJ Code	FT00350-6/1

1.2. HB: 4700.0~4850.0MHz


Insertion Loss # Return Loss

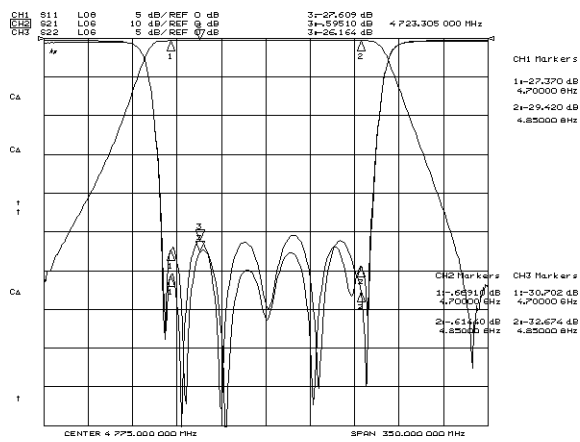

Pass Band Ripple

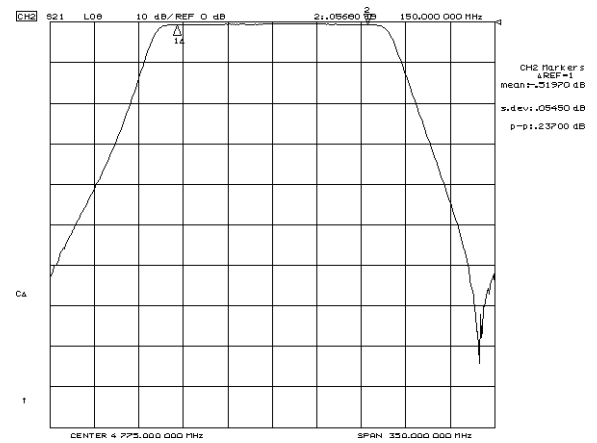

Rejection [<4550.0MHz / >5000.0MHz]

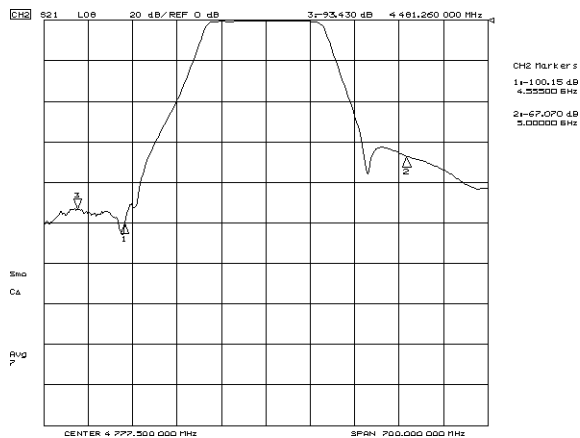


	Date	Version No.	1.0
	Customer	KJ Code	FT00350-6/1


2. Temperature Data (High Temperature : +85.0 ℃ / 7H)

2.1. LB: 4400.0~4550.0MHz


Insertion Loss # Return Loss

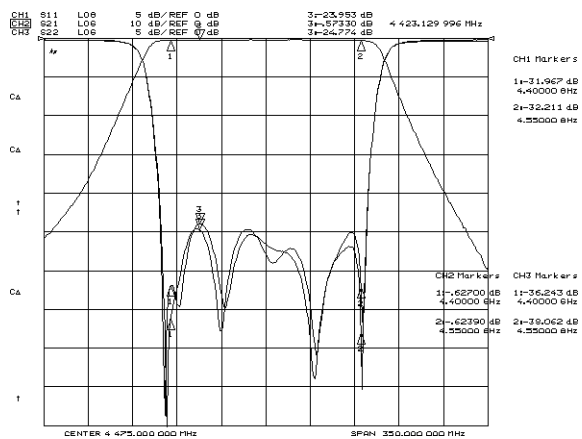

Pass Band Ripple

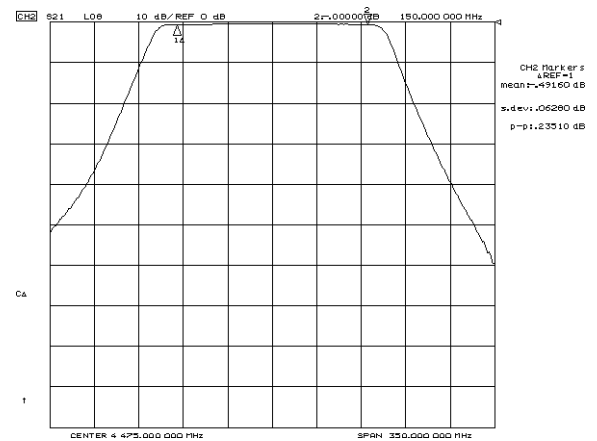


Rejection [<4250.0MHz / >4700.0MHz]

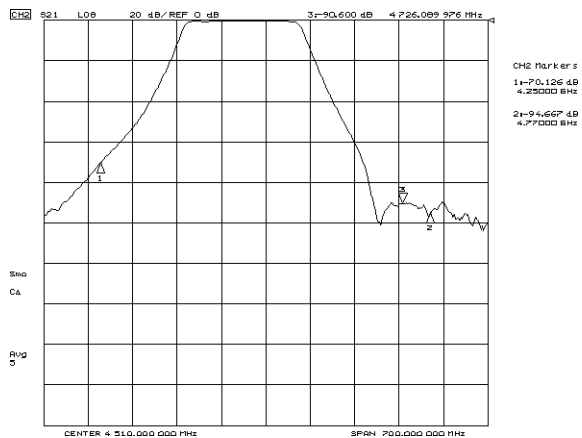


	Date	Version No.	1.0
	Customer	KJ Code	FT00350-6/1

2.2. HB: 4700.0~4850.0MHz


Insertion Loss # Return Loss

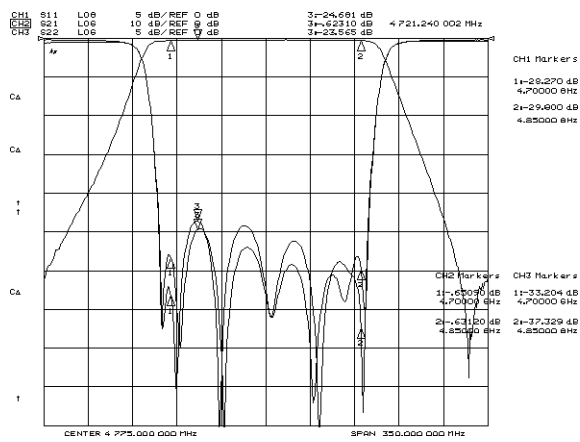

Pass Band Ripple

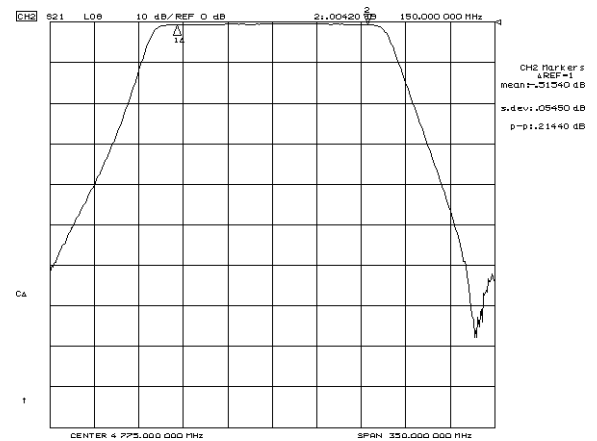

Rejection [<4550.0MHz / >5000.0MHz]

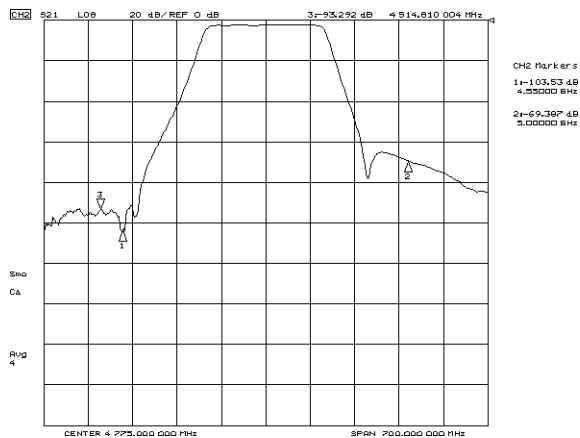


	Date	Version No.	1.0
	Customer	KJ Code	FT00350-6/1


3. Temperature Data (Low Temperature : -40.0 °C / 7H)

3.1. LB: 4400.0~4550.0MHz


Insertion Loss # Return Loss

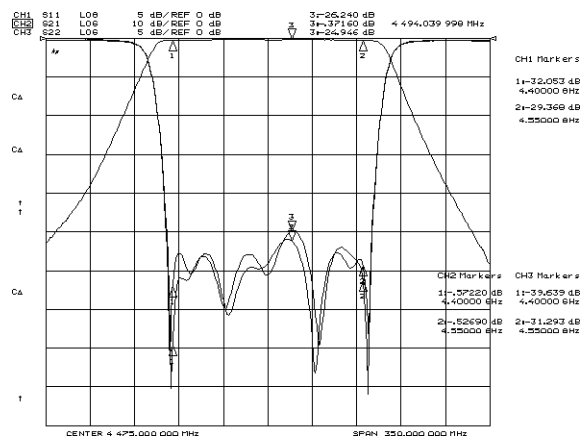

Pass Band Ripple

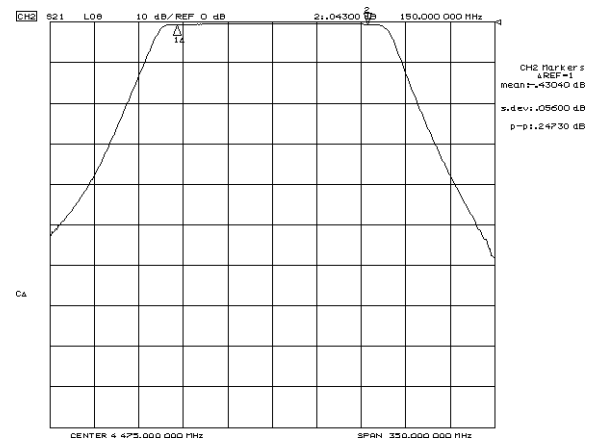


Rejection [<4250.0MHz / >4700.0MHz]

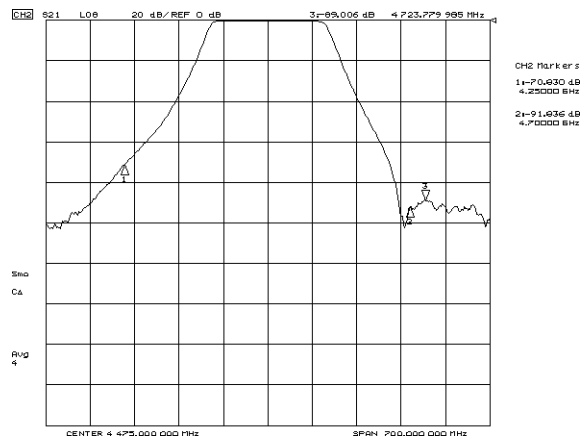


	Date	Version No.	1.0
	Customer	KJ Code	FT00350-6/1

3.2. HB: 4700.0~4850.0MHz

Insertion Loss # Return Loss

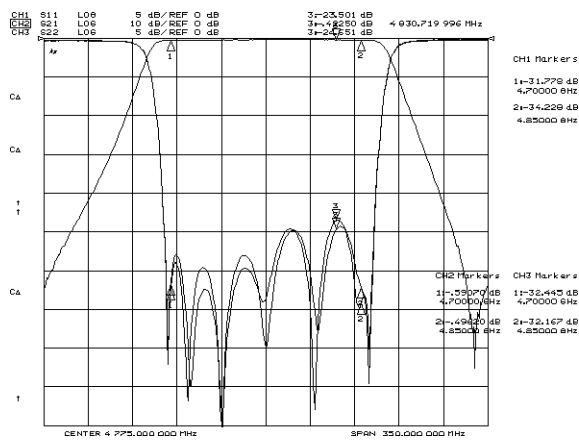

Pass Band Ripple

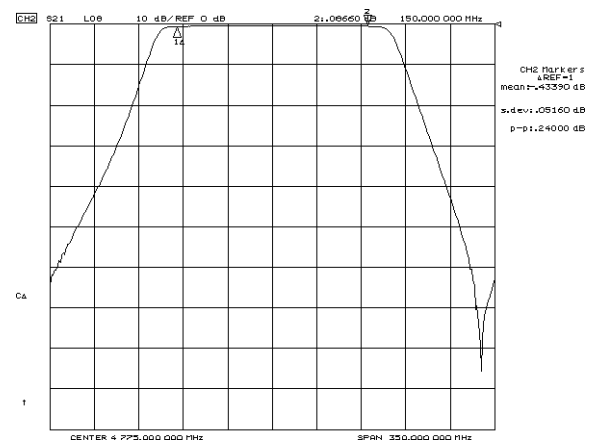

Rejection [<4550.0MHz / >5000.0MHz]

