
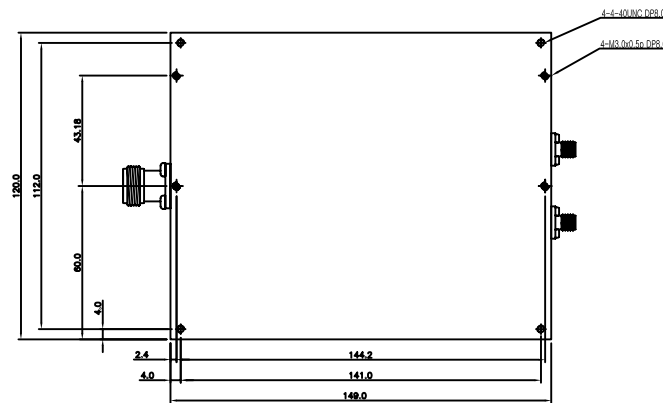
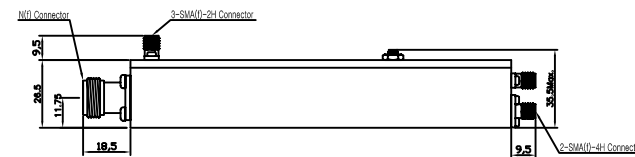


REVISION		
REV	DESCRIPTION	DATE
A	최초 개철	2009.08.26.

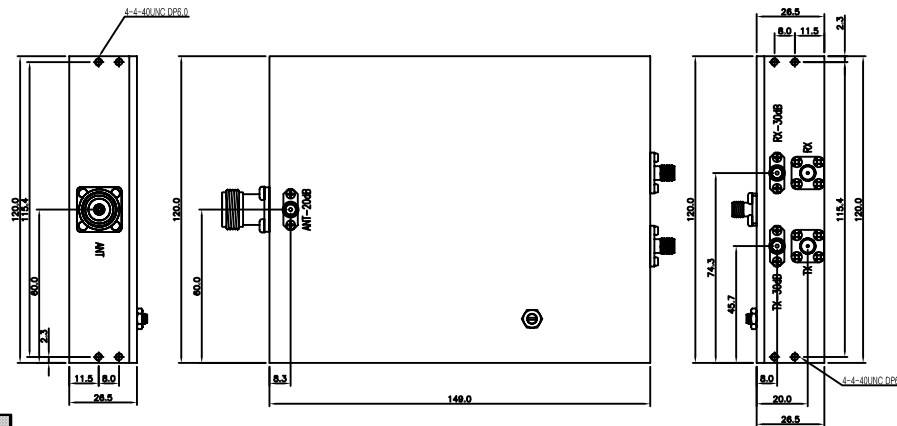

Parameter		Specification		Comments
Model		UMTS		
Frequency Range		TX	RX	
		2110 ~ 2125.0 MHz	1920 ~ 1935.0 MHz	
Bandwidth		15.0 MHz		
Insertion Loss		1.0 dB Max.		
Passband Ripple		0.5 dB Max.		
Return Loss		18.0 dB Max .		
ATT.	@1917.0MHz	5.0 dBc Min.		
	@1938.0MHz			
	@2107.0MHz	5.0 dBc Min.		
	@2128.0MHz			
	824~869.0MHz	80.0 dBc Min.		
	1705~1880.0MHz	50.0 dBc Min.	30.0 dBc Min.	
	@2.3~2.7GHz	60.0 dBc Min.	80.0 dBc Min.	
2.7 GHz~12.75 GHz		40.0 dBc Min.		
Isolation Tx to Rx		90.0 dB Min.		
Rf Power Handle at Ant		250 Watt Max .		
Impedance		50Ω		
Sniffers		ANT: 20dB±0.5dB, RX & TX: 30dB0.5dB		

구코드: DX00246-6/1

TOLERANCE	Decimal	DATE	2009. 08. 26.	KJ CORNTECH	RF & MICROWAVE TECHNOLOGY Tel : 02-32-347-8015 Fax : 02-32-347-8017
	Angle	APPROVED BY	J.H.YOUN		
MATERIAL	±1°	CHECKED BY	M.H.LEE	KJ CORNTECH CO.,LTD.	TITLE
	A6061 T6	DRAWN BY	J.S.LEE		
FINISH	DIC-582(BLACK TEXTURE)	SCALE	1/1	UNIT	mm
A3		DWG NO.	FT00458-6/1	ASS'y	
REVISION		SHEET		1 of 1	