
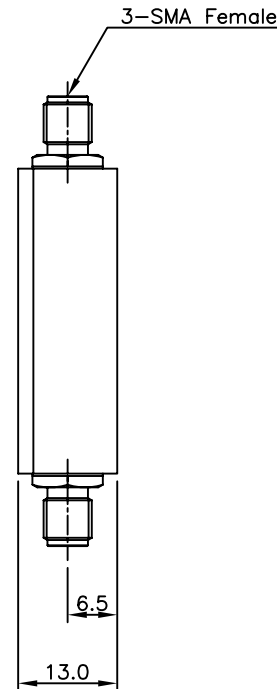


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.08.28.
A	제품 공용화를 위한 SPEC 및 Port 표기 변경	2009.09.08.

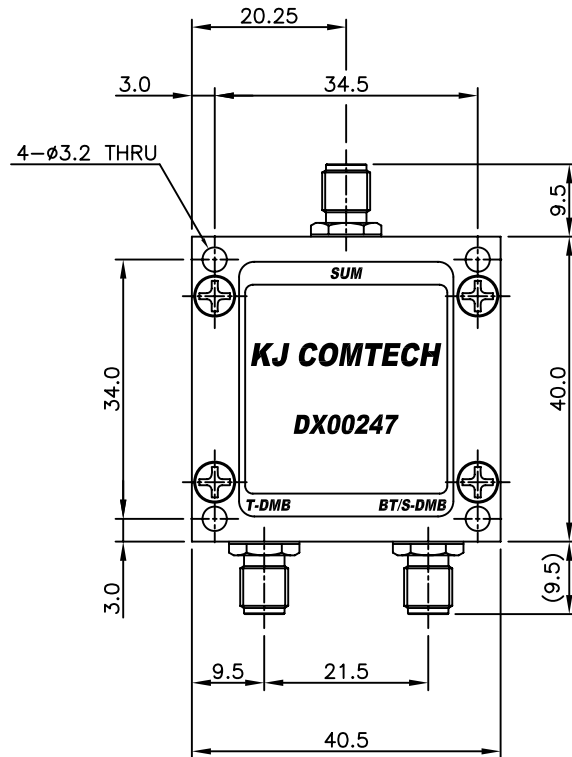

* ELECTRICAL SPECIFICATIONS

Parameter	Specification	
Port	T-DMB	BT/S-DMB
Frequency Range(MHz)	174~240	2400~2500, 2630~2655
Insertion Loss(Max.)	1.1dB	1.1dB
V.S.W.R(Max.)	1	1
Diplexer Isolation(Min.)	60dB	
Impedance	50Ω	

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

구코드: DX00247-7/2

TOLERANCE	Decimal ±0.3	DATE 2009. 09. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	M.H.LEE	TITLE DIPLEXER
		DRAWN BY	K.I.CHO	
FINISH White Chromate		SCALE 1/1	UNIT mm	 A4
		DWG NO.	FT00459-7/2	
		REVISION	REV.A	SHEET 1 of 1