


■ SMA DIPLEXER

- Frequency Range : 174~240, 2402~2655MHz
- P/N : FT00459-7/2


1. SAMPLE 1

1) RF DATA

CH1 : SUM VSWR, CH2: SUM-(T-DMB) INSERTION LOSS
CH3: (T-DMB)-SUM INSERTION LOSS, CH4: T-DMB VSWR

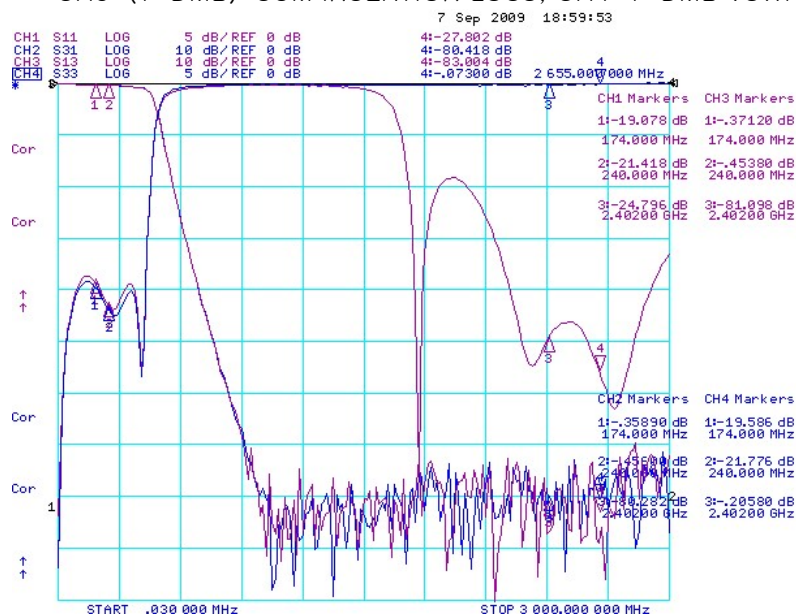

CH1 : SUM VSWR, CH2: SUM-(BT/S-DMB) INSERTION LOSS
CH3: (BT/S-DMB)-SUM INSERTION LOSS, CH4: BT/S-DMB VSWR

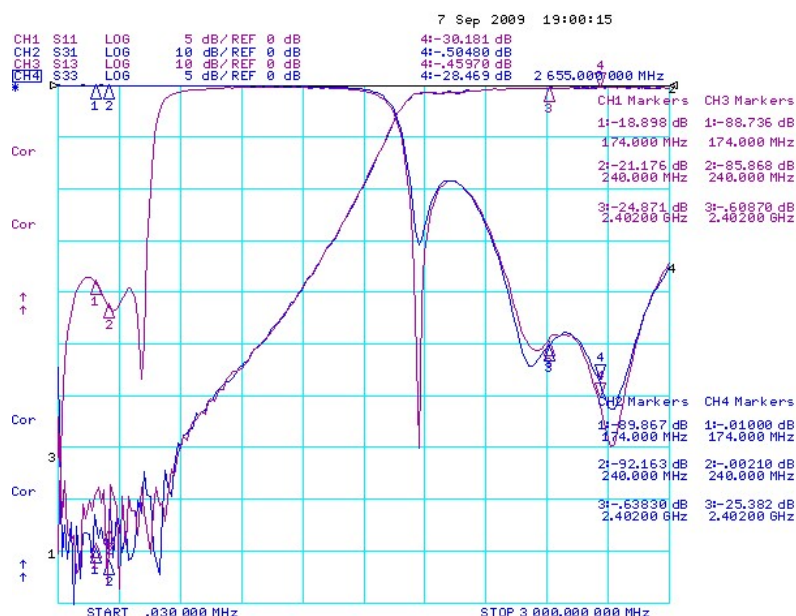

CH1 : T-DMB VSWR, CH2: (T-DMB)-(BT/S-DMB) Isolation
 CH3: (BT/S-DMB)-(T-DMB) Isolation, CH4: BT/S-DMB VSWR

