
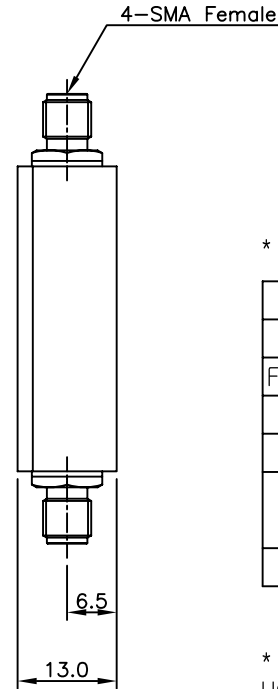


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.09.08.

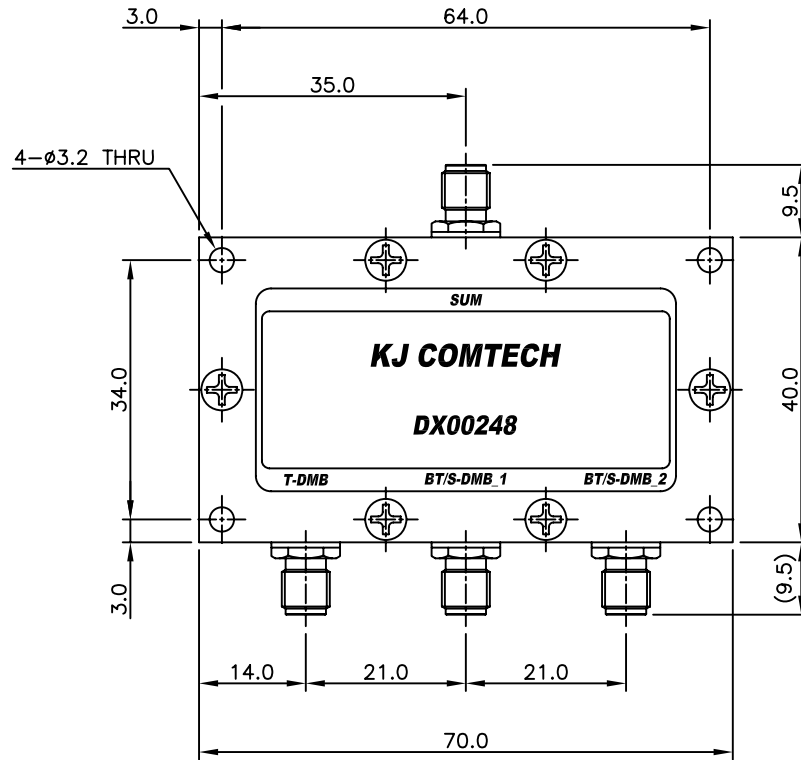

* ELECTRICAL SPECIFICATIONS

Parameter	Specification		
Port	T-DMB	BT/S-DMB_1	BT/S-DMB_2
Frequency Range(MHz)	174~240	2400~2500, 2630~2655	
Insertion Loss(Max.)	1.3dB	1.3dB	
V.S.W.R(Max.)	1	1	
Isolation(Min.)		20dB	
	60dB		
Impedance	50Ω		

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

구코드: DX00248-7/1

TOLERANCE	Decimal	DATE 2009. 09. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	M.H.LEE	TITLE TRIPLEXER
		DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	DWG NO. FT00460-7/1
		UNIT	mm	REVISION I R SHEET 1 of 1