


■ TRIPLEXER


- Frequency Range : 174~240MHz, 2400~2500MHz, 2630~2655MHz
- P/N : DX00248-7/1

1. Electrical Data


CH1: SUM Port V.S.W.R, CH2: Insertion Loss (SUM - T-DMB), CH3: T-DMB V.S.W.R

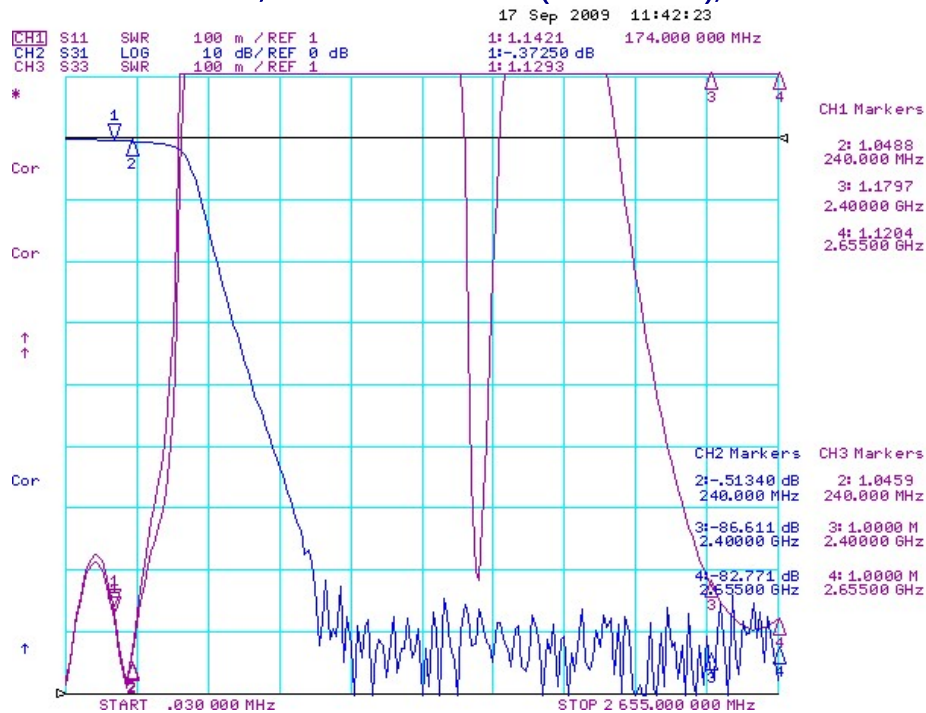


CH1: SUM Port V.S.W.R, CH2: Insertion Loss (SUM - BT/S-DMB_1), CH3: BT/S-DMB_1 Port V.S.W.R

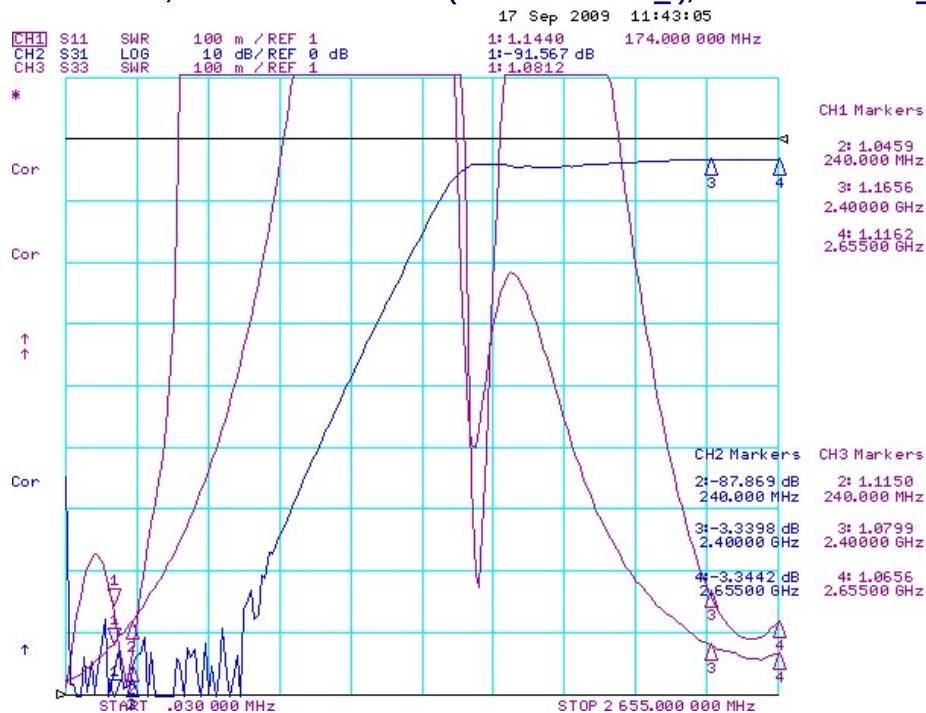

CH1: SUM Port V.S.W.R, CH2: Insertion Loss (SUM – BT/S-DMB_2), CH3: BT/S-DMB_2 Port V.S.W.R

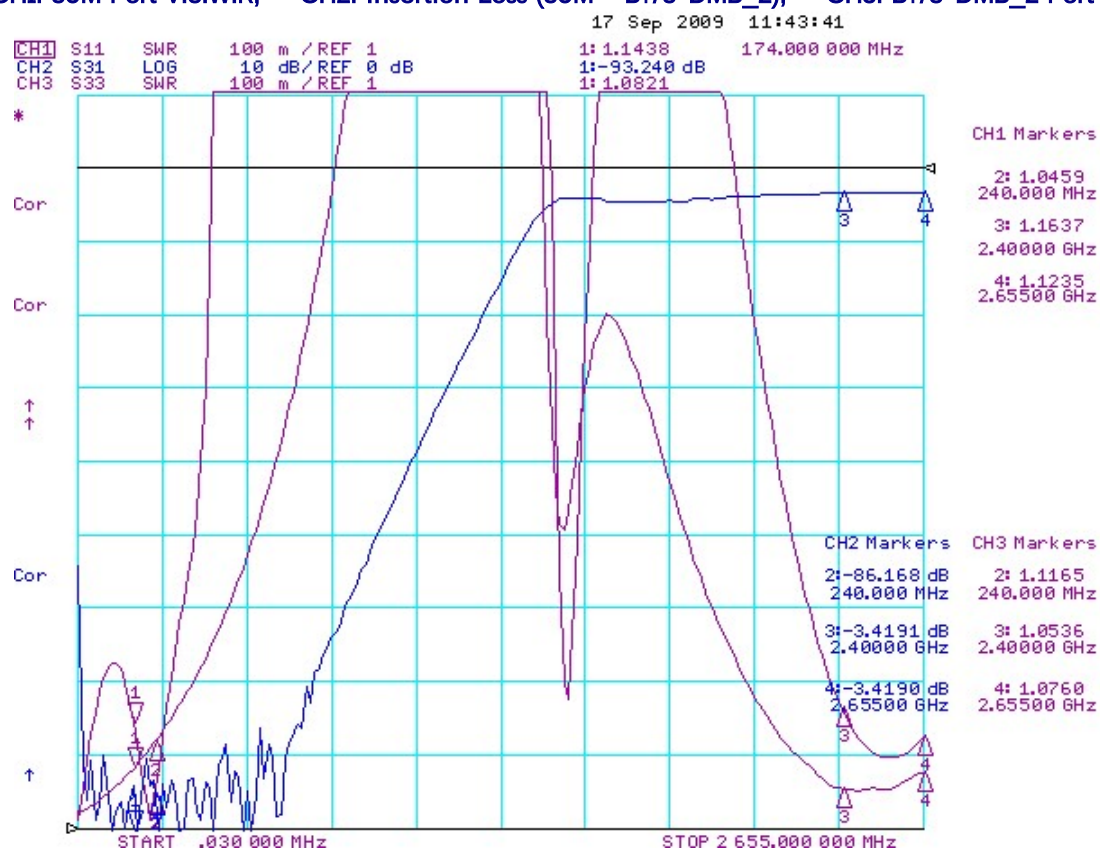


CH1: Isolation (T-DMB – BT/S-DMB_1)

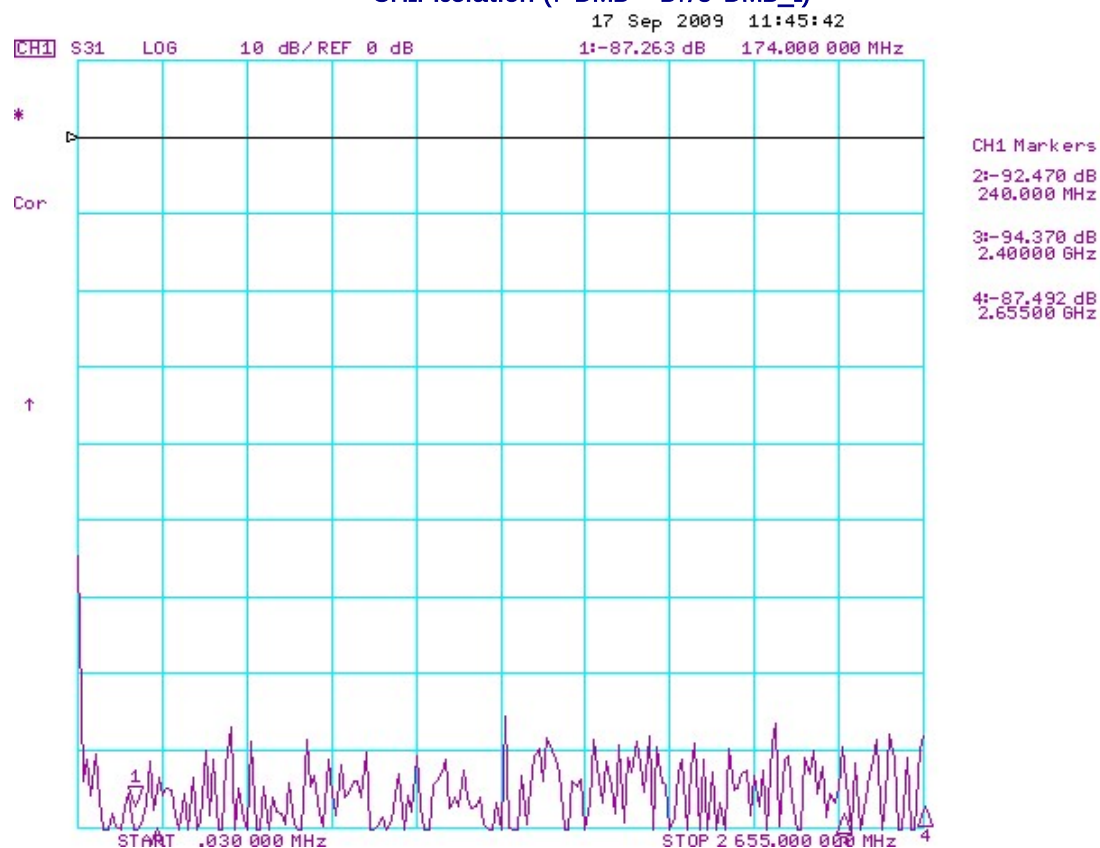

CH1: Isolation (T-DMB – BT/S-DMB_2)

17 Sep 2009 11:46:11

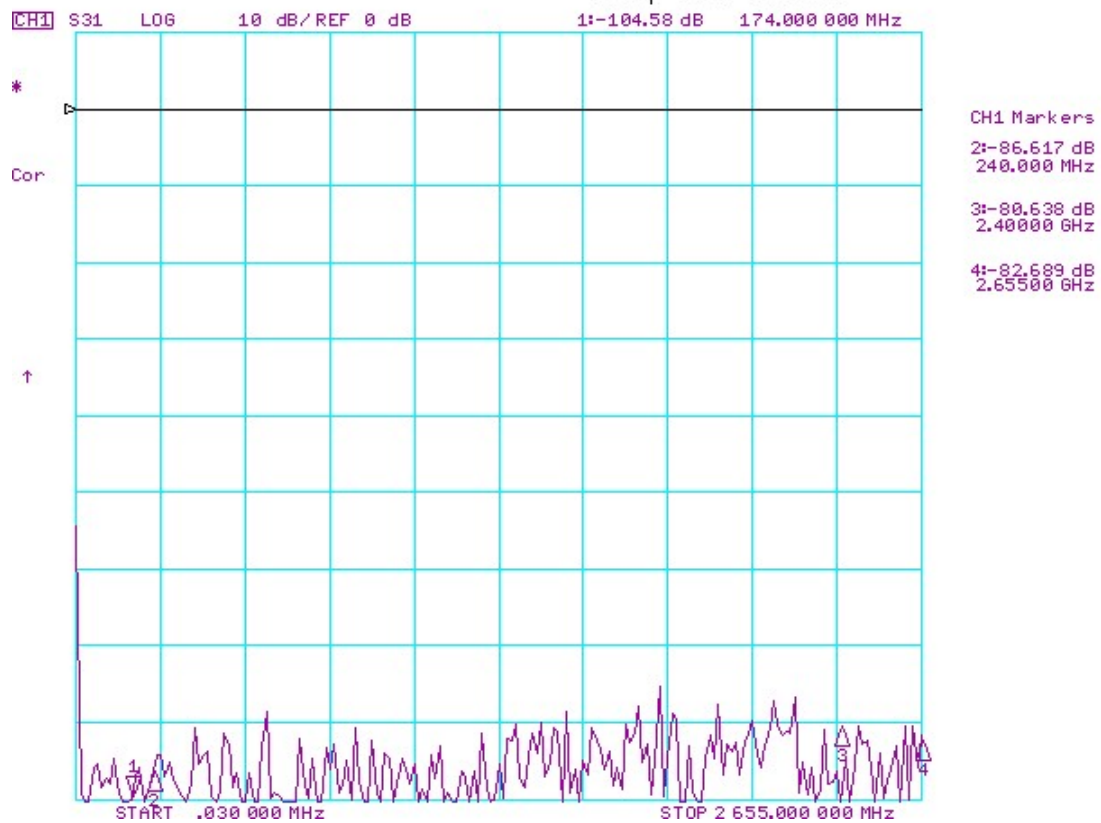

CH1: Isolation (BT/S-DMB_1 – BT/S-DMB_2)

17 Sep 2009 11:46:45

