
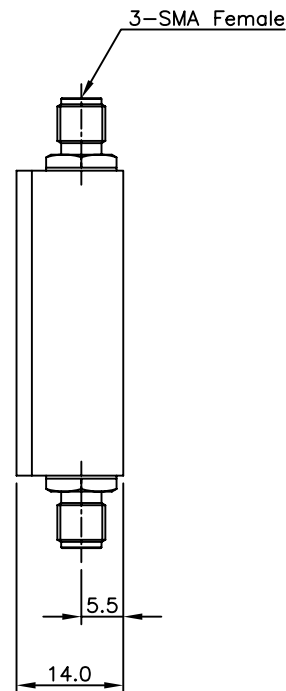


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.02.19.

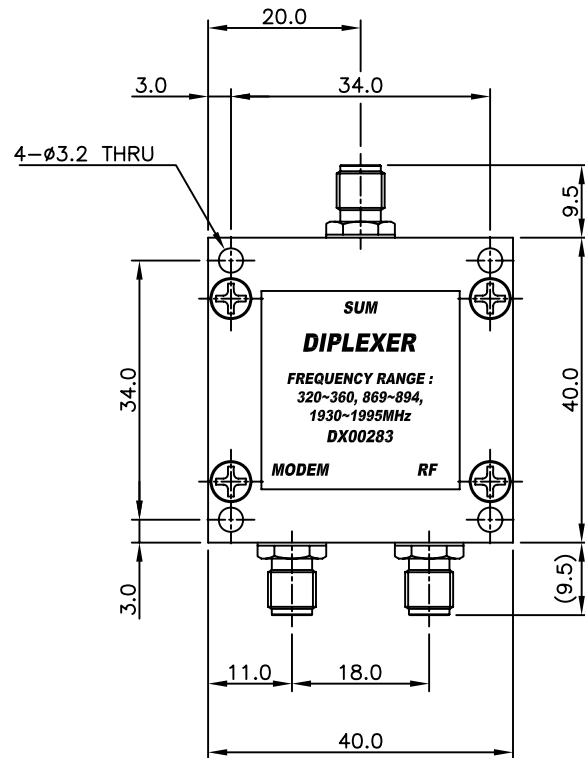

* ELECTRICAL SPECIFICATIONS

Parameter	Specification	
Port	MODEM	RF
Frequency Range(MHz)	320~360	869~894, 1930~1995
Insertion Loss(Max.)	1dB	1dB
V.S.W.R(Max.)	1.3 : 1	1.3 : 1
Isolation(Min.)	60dB	
Handling Power(Max.)	1W	
Impedance	50Ω	
Operating Temp. Range	-30°C~+75°C	
Storage Temp. Range	-30°C~+75°C	

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

구코드: DX00283-7/1

TOLERANCE	Decimal ±0.3	DATE 2010. 02. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		KJ COMTECH CO.,LTD. TITLE DIPLEXER
		DRAWN BY	K.I.CHO	
FINISH White Chromate		SCALE	1/1	A4 DWG NO. FT00495-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	