
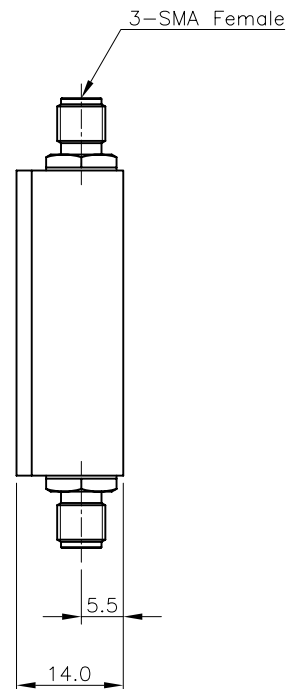


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM	J.H.YOUN	2011.11.23.

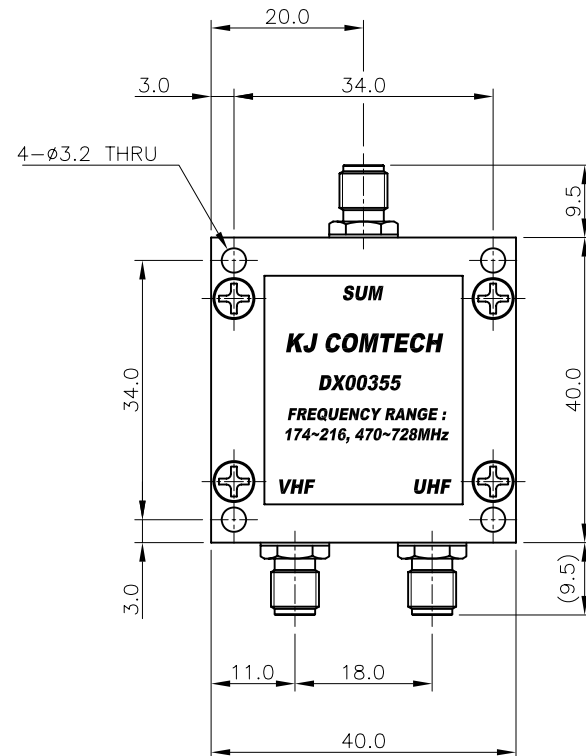


* ELECTRICAL SPECIFICATIONS

Parameter	Specification	
Port	VHF	UHF
Frequency Range(MHz)	174~216	470~728
Insertion Loss(Max.)	1.5dB	
V.S.W.R(Max.)	1.3 : 1	
Isolation(Min.)	50dB	
Handling Power(Max.)	1W	
Impedance	50Ω	
Operating Temp. Range	-30°C~+75°C	
Storage Temp. Range	-30°C~+75°C	

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

구 코드 : DX00355-7/1

TOLERANCE	Decimal ±0.3	DATE 2011. 11. 23.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	
	Angle ±1°	APPROVED BY	J.H.YOUN			
MATERIAL A6061 T6	CHECKED BY	I.C.KIM			TITLE DIPLEXER	
	DRAWN BY	J.H.YOUN				
FINISH White Chromate	SCALE 1/1	UNIT mm			DWG NO. FT00566-7/1	SHEET 1 of 1
					REVISION 1	