


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.H.LEE	S.H.LEE	2015.05.06.

Electrical Specification	
Frequency Range	6401~6451MHz
Insertion Loss	3dB Max.
Ripple	1.2dB Max.
Return Loss	18dB Min.
Attenuation	40dB Min. @6376MHz
	40dB Min. @6476MHz
Power Handling	1W
Vibration	MIL-STD-810E Method 514.4
Shock	MIL-STD-810F Method 516.5
Rain	MIL-STD-810F Method 506.4
Impedance	50 Ω
Mechanical Specification	
Dimensions (mm)	67.0 x 48.0 x 26.0
Weight (Max.)	0.7Kg
Operating Temperature	MIL-STD-810F Method 520.2
Relative Humidly	MIL-STD-810F Method 507.4
Connector Finish	Tri-plate
Housing Finish	Black Coating

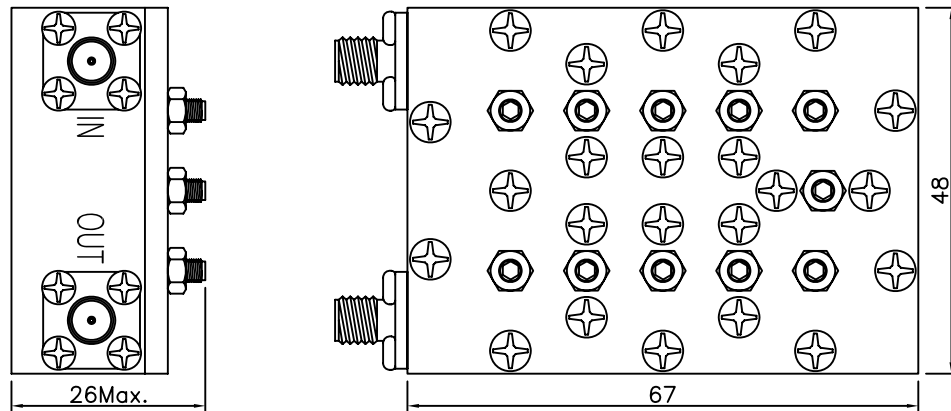

TOLERANCE	Decimal ±0.3	DATE 2015. 05. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°				
MATERIAL		APPROVED BY	S.H.LEE	TITLE Ass'y	
PLATING		CHECKED BY			
FINISH	Black	DRAWN BY		DWG NO. FT00654-6/1 REVISION R SHEET 1 of 1	
		SCALE 1/1	UNIT mm	 A4	