


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2021.11.18.

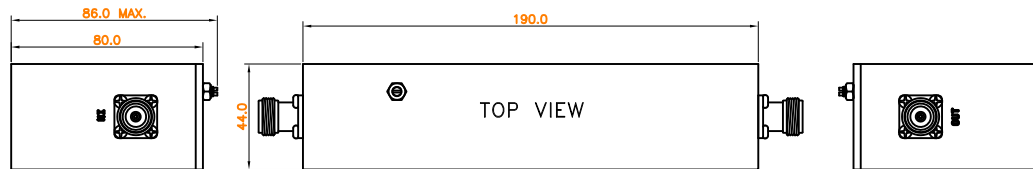

* ELECTRICAL SPECIFICATION

Frequency Range : 430 MHz ~ 450 MHz
 Insertion Loss : 1.0dB Max.
 Ripple : 0.8dB Max.
 Return Loss : 18dB Min.
 Attenuation
 420 MHz / 460 MHz : 20dB Min.
 Power Handling : 20W Max.
 Impedance : 50Ω
 Connector : N Type (F)
 Operating Temperature : -20~+70 °C
 Finish : Black Coating

TOLERANCE	Decimal	DATE 2021. 11. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON	
MATERIAL	A6061 T6	CHECKED BY	S.L.SON	TITLE Band Pass Filter
		DRAWN BY	K.S.KIM	
FINISH	Black	SCALE	1/1	DWG NO. FT00761-N/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	