
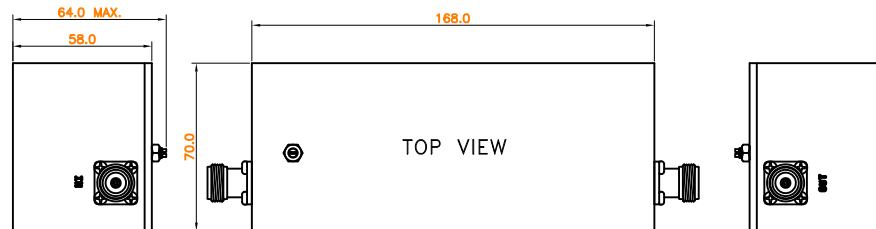
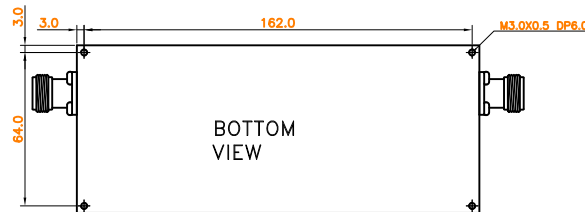


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2021.11.18.



* ELECTRICAL SPECIFICATION

Frequency Range : 900 MHz ~ 990 MHz
Insertion Loss : 1.0dB Max.
Ripple : 0.8dB Max.
Return Loss : 18dB Min.
Attenuation
885 MHz / 1005 MHz : 20dB Min.
Power Handling : 20W Max.
Impedance : 50Ω
Connector : N Type (F)
Operating Temperature : -20~+70 °C
Finish : Black Coating

TOLERANCE	Decimal ±0.3	DATE 2021. 11. 18.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.L.SON		
MATERIAL A6061 T6		CHECKED BY	S.L.SON		TITLE Band Pass Filter
		DRAWN BY	K.S.KIM		
FINISH Black		SCALE 1/1	UNIT mm		A2
		DWG NO.		FT00762-N/1	
		REVISION		1	SHEET 1 of 1