
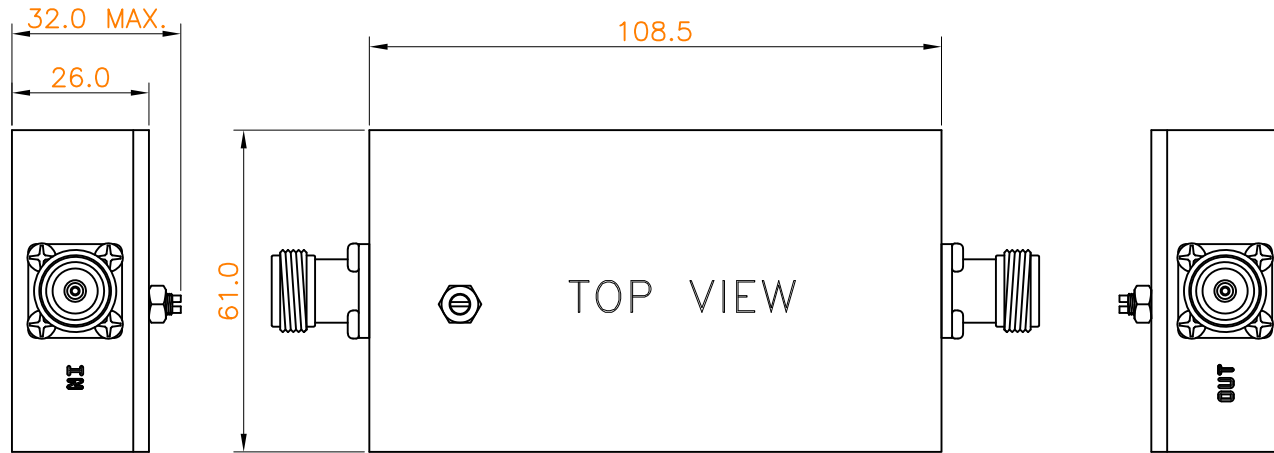


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	K.S.KIM	S.L.SON	2021.11.18.
△				

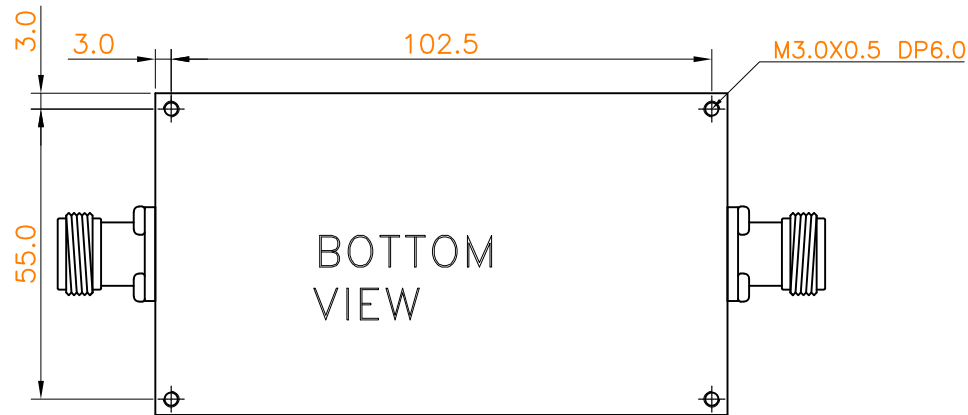

* ELECTRICAL SPECIFICATION

Frequency Range : 2400 MHz ~ 2480 MHz
Insertion Loss : 1.0dB Max.
Ripple : 0.8dB Max.
Return Loss : 18dB Min.
Attenuation
2385 MHz / 2495 MHz : 20dB Min.
Power Handling : 20W Max.
Connector : N Type (F)
Impedance : 50Ω
Operating Temperature : -20~+70 °C
Finish : Black Coating

TOLERANCE	Decimal	DATE	2021. 11. 18.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON	
	±1°	CHECKED BY	S.L.SON	
MATERIAL	A6061 T6	DRAWN BY	K.S.KIM	KJ COMTECH CO.,LTD. TITLE Band Pass Filter
FINISH	Black	SCALE	1/1	
		UNIT	mm	
 A3				DWG NO. FT00763-N/1 REVISION 1 SHEET 1 of 1