





REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	K.S.KIM	S.L.SON	2021.11.18.
△				

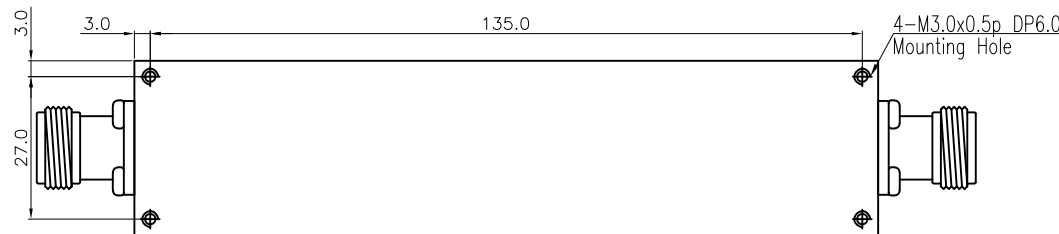

2-N Type(F) Connector

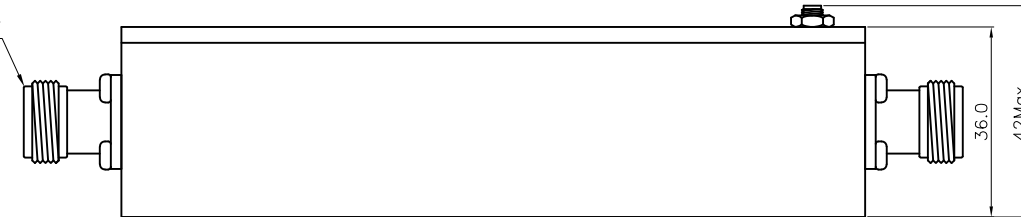

* ELECTRICAL SPECIFICATION

Frequency Range : 1217 MHz ~ 1237 MHz
Insertion Loss : 1.2dB Max.
Ripple : 0.8dB Max.
Return Loss : 18dB Min.
Attenuation
FC $\pm$ 20MHz : 10dB Min.
FC $\pm$ 40MHz : 40dB Min.
FC $\pm$ 60MHz : 60dB Min.
Power Handling : 20W Max.
Impedance : 50 Ω
Connector : N Type (F)
Operating Temperature : -20~+70 $^{\circ}$ C
Finish : Black Coating

TOLERANCE	Decimal	DATE	2021. 11. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON		
MATERIAL	±1°	CHECKED BY	S.L.SON		TITLE
	A6061 T6	DRAWN BY	K.S.KIM		
FINISH	Black	SCALE	UNIT		A3
		1/1	mm		
					DWG NO. FT00765-N/1
					REVISION 1 SHEET 1 of 1
					Band Pass Filter