

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	K.S.KIM	S.L.SON	2022.05.11.
△				

A

A

B


B

C



C

D


D

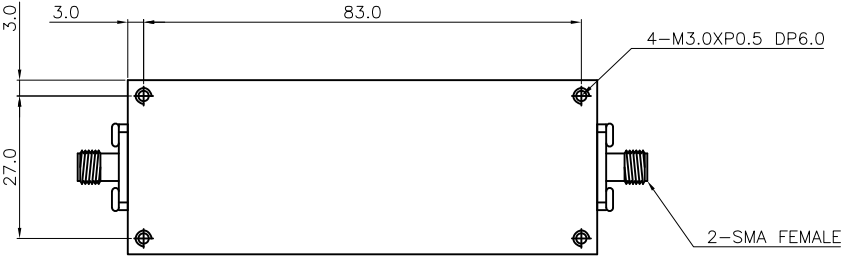

BOTTOM VIEW

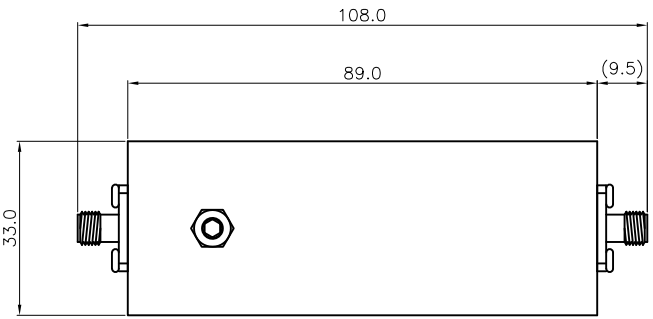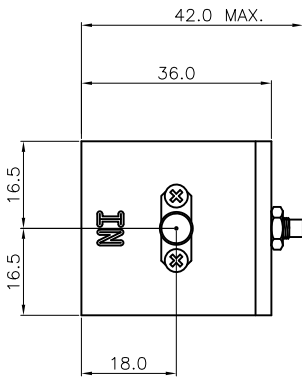

TOP VIEW

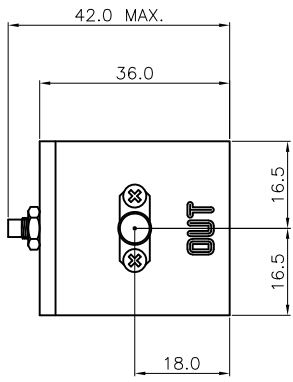

ELECTRICAL SPECIFICATION

Frequency Range : 1565 MHz ~ 1612 MHz
 Insertion Loss : 1.0dB Max.
 Ripple : 0.8dB Max.
 Return Loss : 18dB Min.
 Power Handling : 50W Max.
 Impedance : 50Ω
 Connector : SMA Type (F)
 Operating Temperature : -20~+70 °C
 Finish : Black Coating

TOLERANCE	Decimal	DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	±0.3	2022. 05. 11.						
	Angle	APPROVED BY	S.L.SON					
MATERIAL	±1°	CHECKED BY	S.L.SON	TITLE				
	A6061 T6	DRAWN BY	K.S.KIM					
	Band Pass Filter							
FINISH	Black	SCALE	UNIT	A3	DWG NO.		FT00767-N/1	
		1/1	mm		REVISION	1	SHEET	1 of 1
								