

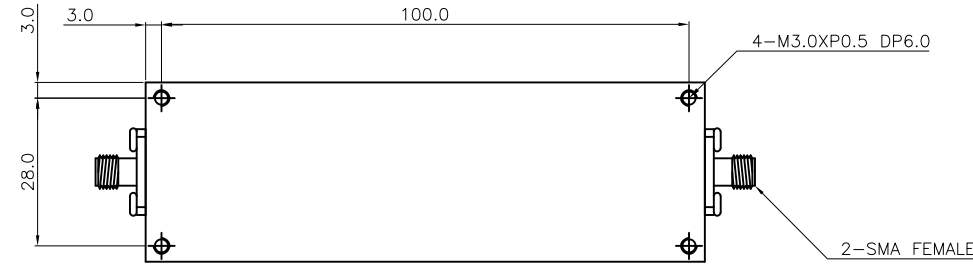



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	K.S.KIM	S.L.SON	2022.05.11.
△				

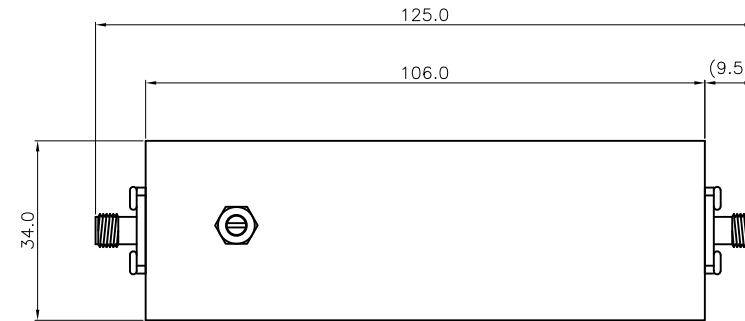

BOTTOM VIEW

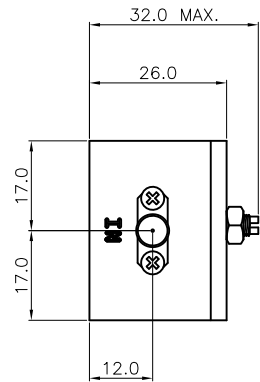

TOP VIEW

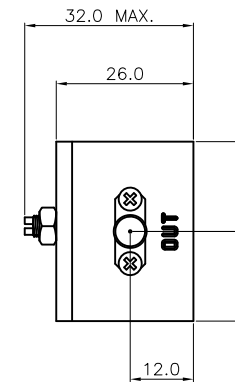

ELECTRICAL SPECIFICATION

Frequency Range : 2400 MHz ~ 2500 MHz
 Insertion Loss : 1.0dB Max.
 Ripple : 0.8dB Max.
 Return Loss : 18dB Min.
 Power Handling : 50W Max.
 Connector : SMA Type (F)
 Impedance : 50Ω
 Operating Temperature : -20~+70 °C
 Finish : Black Coating

TOLERANCE	Decimal ±0.3	DATE 2022. 05. 11.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY S.L.SON		
		CHECKED BY S.L.SON		
MATERIAL	A6061 T6	DRAWN BY K.S.KIM	TITLE Band Pass Filter	
FINISH	Black	SCALE 1/1	UNIT mm	 A3
		DWG NO. FT00768-N/1	REVISION 1	SHEET 1 of 1