




| REVISION |                      |         |         |             |
|----------|----------------------|---------|---------|-------------|
| REV      | DESCRIPTION          | DRAWN   | APPR    | DATE        |
| 1        | Initial Registration | K.S.KIM | S.L.SON | 2023.03.31. |

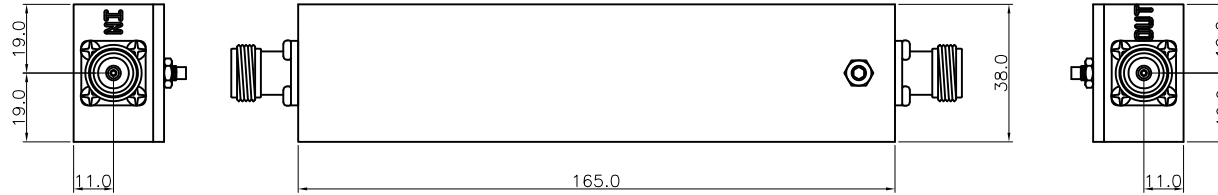

TOP VIEW

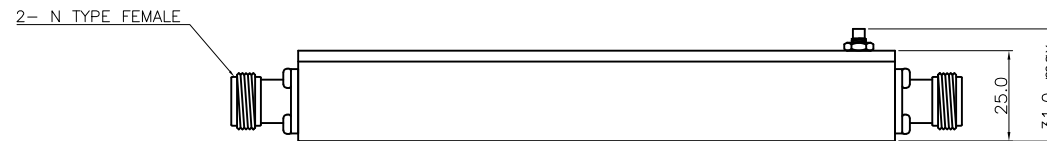

SIDE VIEW

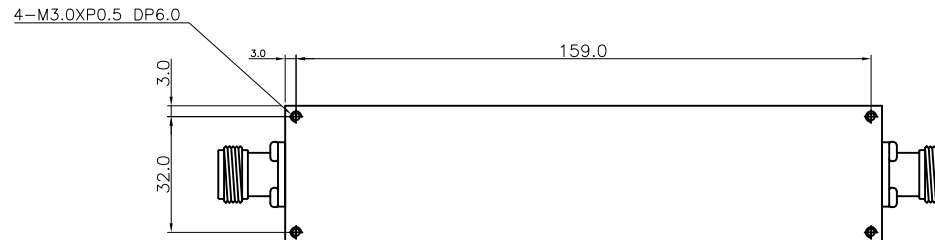

BOTTOM VIEW

### ELECTRICAL SPECIFICATION

Frequency Range : 5725 MHz ~ 5875 MHz  
Insertion Loss : 0.5dB Max.  
Ripple : 0.3dB Max.  
Return Loss : 18dB Min.  
Power Handling : 200W Max.  
Impedance : 50Ω  
Connector : N Type (F)  
Finish : Black Coating

|           |         |             |               |       |                                                                              |
|-----------|---------|-------------|---------------|-------|------------------------------------------------------------------------------|
| TOLERANCE | Decimal | DATE        | 2023. 03. 31. |       | RF & MICROWAVE<br>TECHNOLOGY<br>Tel : 82-32-347-8015<br>Fax : 82-32-347-8017 |
|           | Angle   | APPROVED BY | S.L.SON       |       |                                                                              |
| MATERIAL  | ±1°     | CHECKED BY  | S.L.SON       | TITLE | Band Pass Filter                                                             |
|           | A6061   | DRAWN BY    | K.S.KIM       |       |                                                                              |
| FINISH    | Black   | SCALE       | 1/1           | UNIT  | mm                                                                           |
|           |         |             |               |       | DWG NO. FT00779-N/1<br>REVISION 1 SHEET 1 of 1                               |