
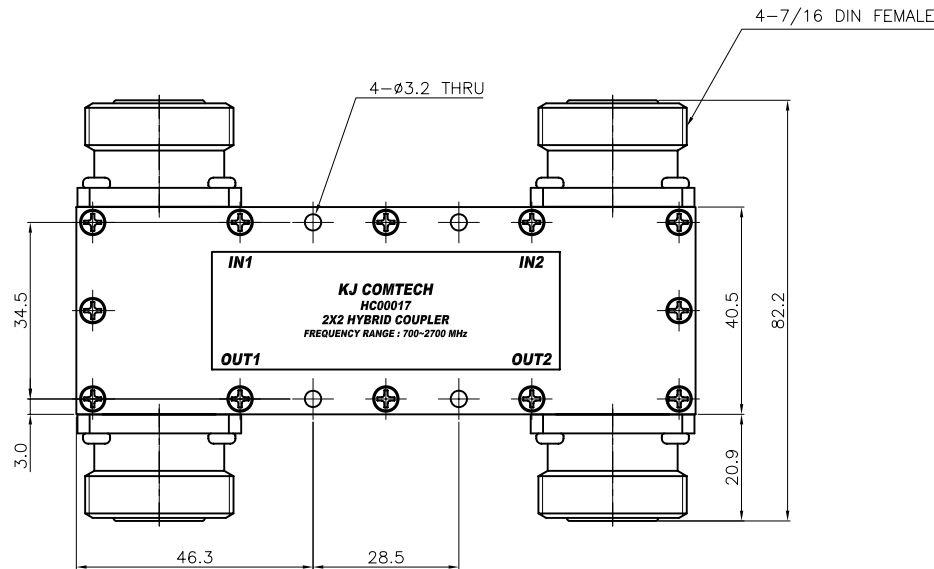


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2016.02.24.

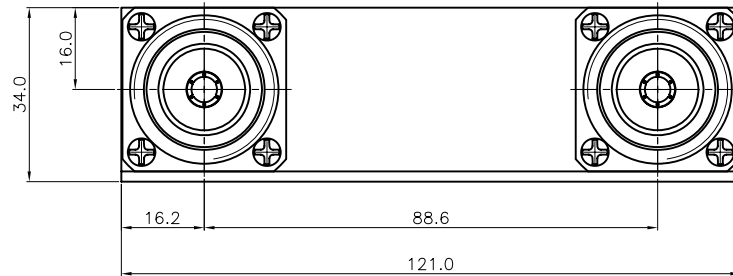

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~2700 MHz
Coupling (IN1-OUT1, IN1-OUT2,
IN2-OUT1, IN2-OUT2) : 3.0 ± 0.8 dB(MAX.)
All Port V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 23.0 dB
Power : 400W
PIMD : -150dBc(@43dBm 2 Tone, CDMA,WCDMA)
Impedance : 50 Ω

* ENVIRONMENTAL SPECIFICATIONS
Operating temperature : -40 ~ +70°C
Environmental Class : IP68

* MECHANICAL SPECIFICATIONS
Housing : A6061 T6 (DIC-582 Texture)
Connector : MBsBD (SUCO)
Connector pin : Beryllium Copper (Silver plate)

*TEXT SPECIFICATIONS
FONT : Arial White
Text Size : 2.3mm

TOLERANCE	Decimal	DATE	2016. 02. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	J.H.YOUN					
MATERIAL	±1°	CHECKED BY	S.L.SON		TITLE			
	A6061 T6	DRAWN BY	T.J.KIM					
FINISH	DIC-582(BLACK)	SCALE	1/1	UNIT	A3	DWG NO.	HC00017-6/1	
				mm			REVISION	1

 KJ COMTECH CO.,LTD.		TITLE	
		3dB COUPLER	