| REVISION | | | | |
|---|---|---|---|---|
| REV | DESCRIPTION | DRAWN | APPR | DATE |
| 1 | Initial Registration | T.J.KIM | J.H.YOUN | 2016.02.24. |
| | | | | |

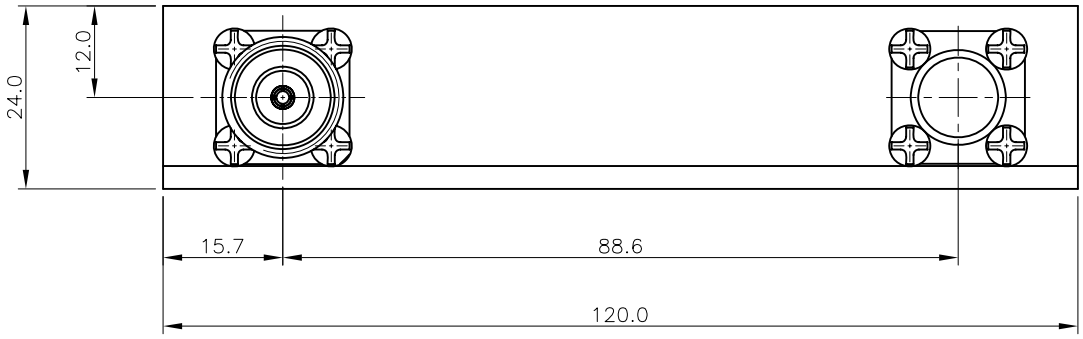


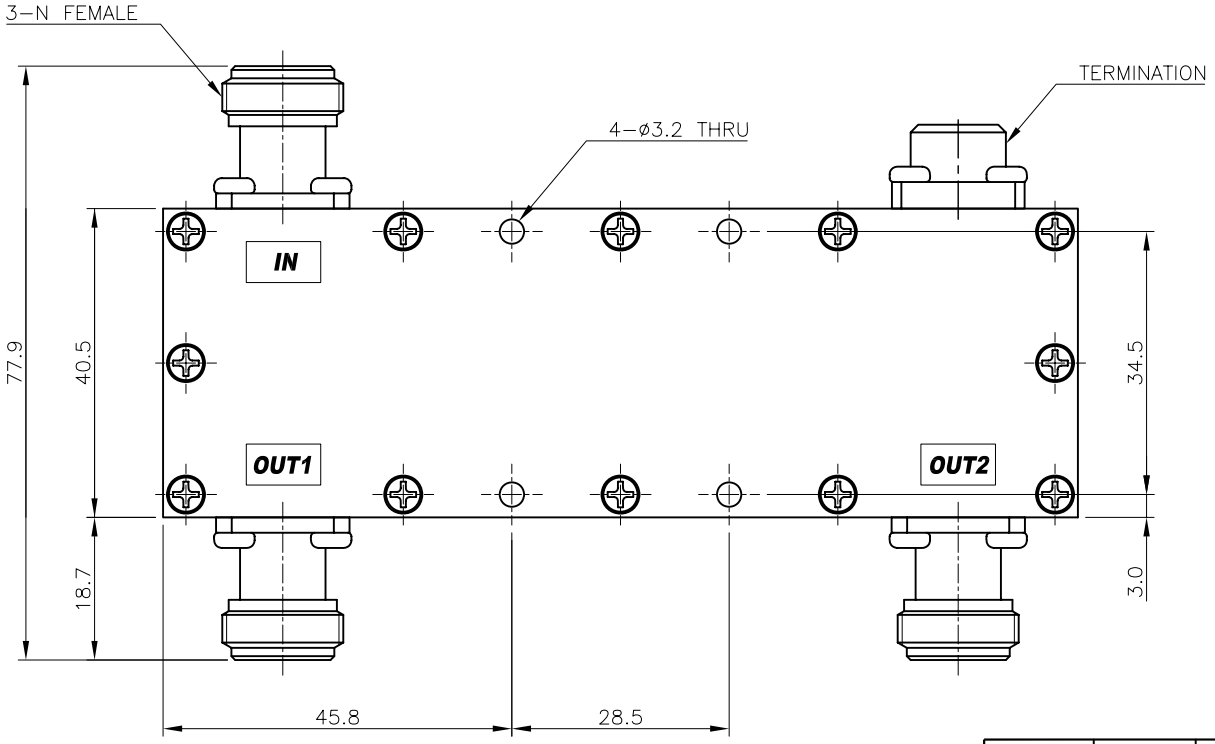


* ELECTRICAL SPECIFICATIONS
Frequency Range : 700~2700 MHz
Insertion Loss (IN-OUT1, IN-OUT2) : 3.0 ± 0.8 dB(MAX.)
All Port V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 23.0 dB
Power : 120 W
PIMD : -150dBc(@43dBm 2 Tone, CDMA,WCDMA)
Impedance : 50 Ω

* ENVIRONMENTAL SPECIFICATIONS
Operating temperature :-35 ~ +75℃
Environmental Class : IP68

* MECHANICAL SPECIFICATIONS
Housing : A6061 T6 (DIC-582 Texture)
Connector : MBsBD (SUCO)
Connector pin : Beryllium Copper (Silver plate)

*TEXT SPECIFICATIONS
FONT : Arial White
Text Size : 2.3mm

| | | | | |
|---|---|---|---|---|
| TOLERANCE | Decimal ±0.3 | DATE 2016. 2. 24. | | |
| | Angle ±1° | APPROVED BY | J.H.YOUN | |
| | | CHECKED BY | S.L.SON | |
| MATERIAL A6061 T6 | | DRAWN BY | T.J.KIM | |
| FINISH DIC-582 (Texture) | | SCALE 1/1 | UNIT mm | |


KJ COMTECH
KJ COMTECH CO.,LTD.
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017


TITLE: 3dB COUPLER

A4 | DWG NO. HC00022-6/1 | REVISION 1 | SHEET 1 of 1