


REVISION		
REV.	DESCRIPTION	DATE
△		
△		

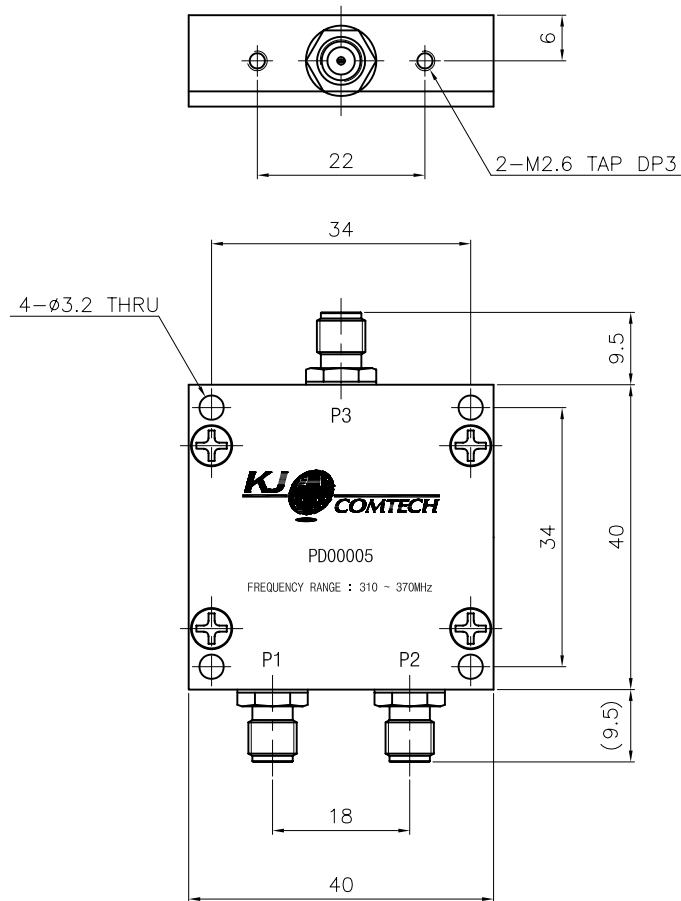

* ELECTRICAL SPECIFICATIONS

Frequency Range : 310.0 ~ 370.0MHz

Insertion Loss (Max.) : 3.5dB

V.S.W.R (Max.) : 1.3 : 1

Isolation (Min.) : 25.0dB

Amplitude Unbalance (Max.) : 0.3dB

Phase Unbalance (Max.) : 3.0°

Power Handling (Max.) : 1.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			2005. 9. 8.		 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.3	APPROVED BY								
	Angle	CHECKED BY								
MATERIAL	± 1°	DRAWN BY				TITLE <i>2WAY POWER DIVIDER</i>				
	A6061 T6									
FINISH	Yellow Chromate	SCALE	UNIT	mm		A4	DWG NO.	PD00005-7/1		
		1/1					SHEET	1	OF	1