




REVISION		
REV	DESCRIPTION	DATE
1	업체 요구로 인한 BAR CODE 추가(설번200810-0030)	2008.10.31.

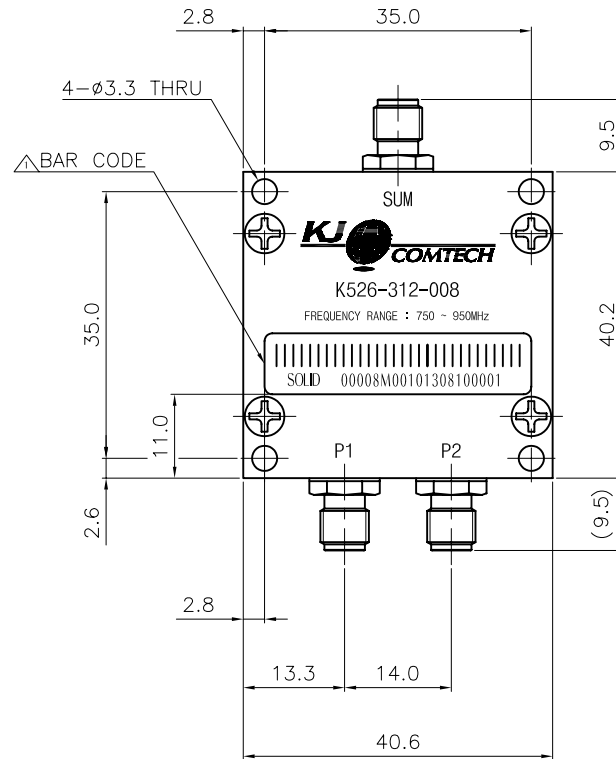

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 750.0 ~ 950.0MHz
 Insertion Loss (Max.) : 3.31dB
 V.S.W.R (Max.) : 1.22 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.2dB
 Phase Unbalance (Max.) : 2.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

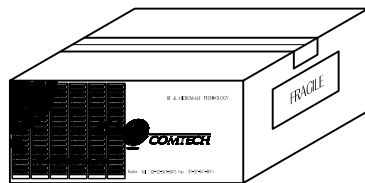

* 바코드 라벨 부착

1. 제품 : 상단 도면을 참조하여 해당 위치에 부착
2. BOX : 좌측 도면을 참조하여 BOX의 앞단 좌측 부터 부착

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	DATE 2005. 9. 8.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
	± 0.3	APPROVED BY		S.W.LEE					
	Angle	CHECKED BY		J.H.YOUN					
MATERIAL		DRAWN BY		TITLE					
A6061 T6		K.I.CHO		2WAY POWER DIVIDER					
FINISH	Yellow Chromate	SCALE	UNIT		A4	DWG. NO.	PD00023-7/2		
		1/1	mm			SHEET	1	OF	1