
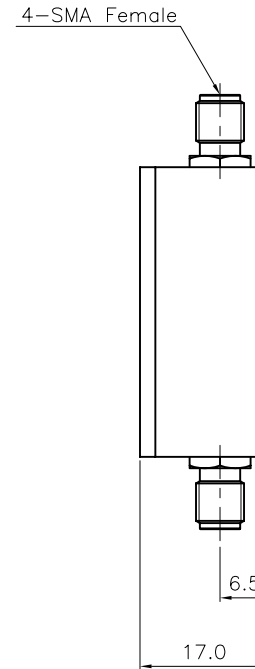


REVISION		
REV	DESCRIPTION	DATE
1	PCB 변경 및 CAPACITOR 추가	2007.02.22.
2	업체 요구로 인한 BAR CODE 추가(설번200810-0030)	2008.10.31.

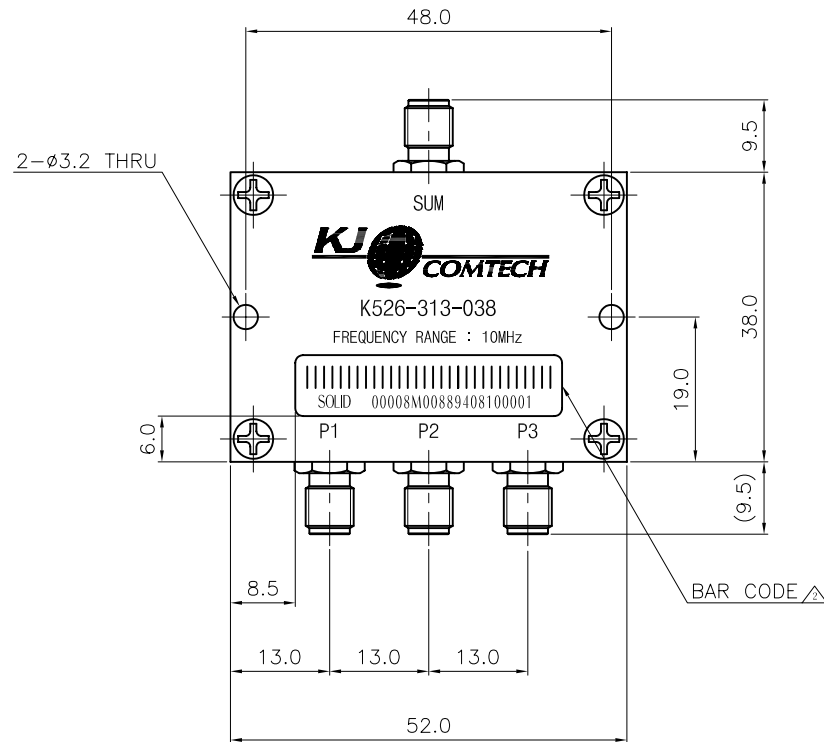


* ELECTRICAL SPECIFICATIONS

Frequency Range : 10.0MHz
Insertion Loss (Max.) : 5.2dB
Input V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

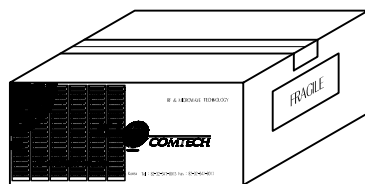

* 바코드 라벨 부착

1. 제품 : 상단 도면을 참조하여 해당 위치에 부착
2. BOX : 좌측 도면을 참조하여 BOX의 앞단 좌측 부터 부착

REVISION	REV.B	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
	Decimal ± 0.3 Angle ± 1°	DATE	2005. 6. 10.	 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
TOLERANCE		APPROVED BY	S.W.LEE				
MATERIAL	A6061 T6	CHECKED BY	J.H.YOUN				
FINISH	Yellow Chromate	DRAWN BY	K.I.CHO	TITLE 3WAY POWER DIVIDER			
		SCALE	1/1	UNIT	mm	 A4	DWG NO. PD00111-7/2 SHEET 1 OF 1