


REVISION		
REV	DESCRIPTION	DATE
▲		
▲		

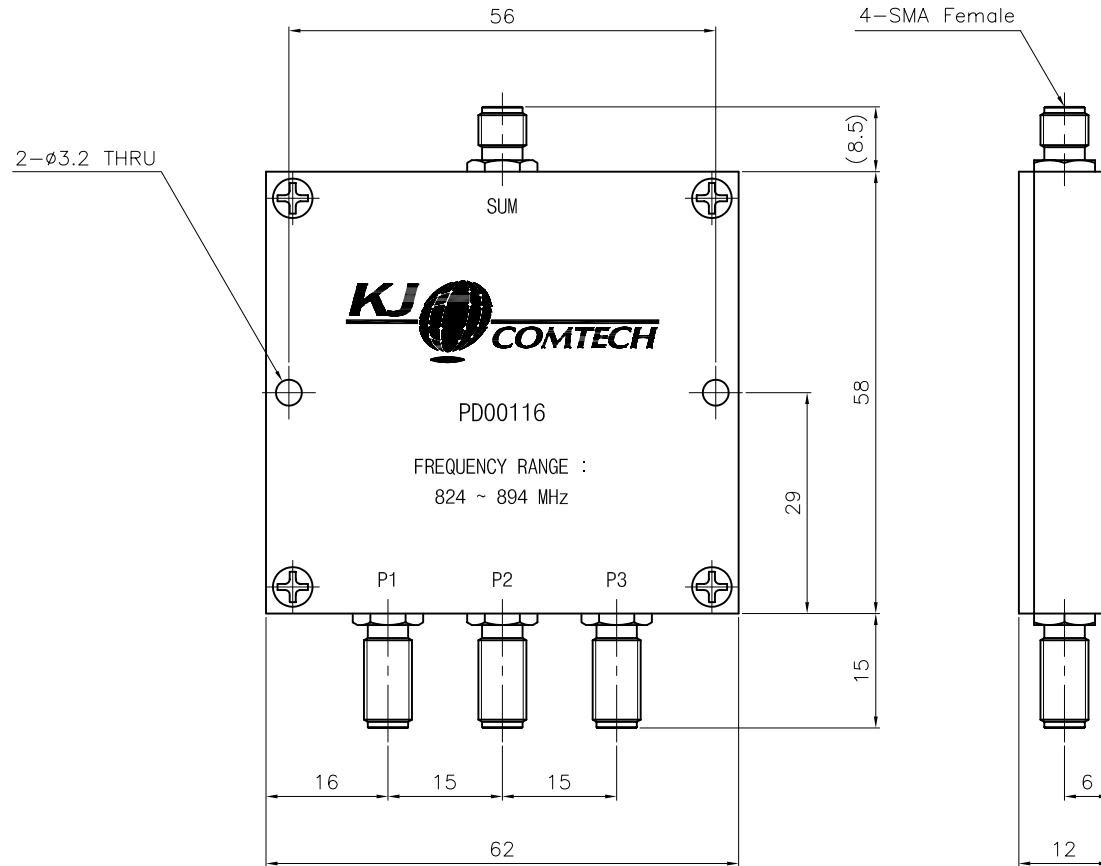

* ELECTRICAL SPECIFICATIONS
Frequency Range : 824.0 ~ 894.0MHz
Insertion Loss (Max.) : 5.07dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Phase Unbalance (Max.) : 3.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2003. 3. 5.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	± 0.3			APPROVED BY						
	Angle					CHECKED BY				
								TITLE		
MATERIAL								3WAY POWER DIVIDER		
A6061 T6										
DRAWN BY										
FINISH				SCALE		UNIT				
Yellow Chromate				1/1		mm				
								A4		
								DWG NO. PD00116-7/1		
								SHEET 1 OF 1		