
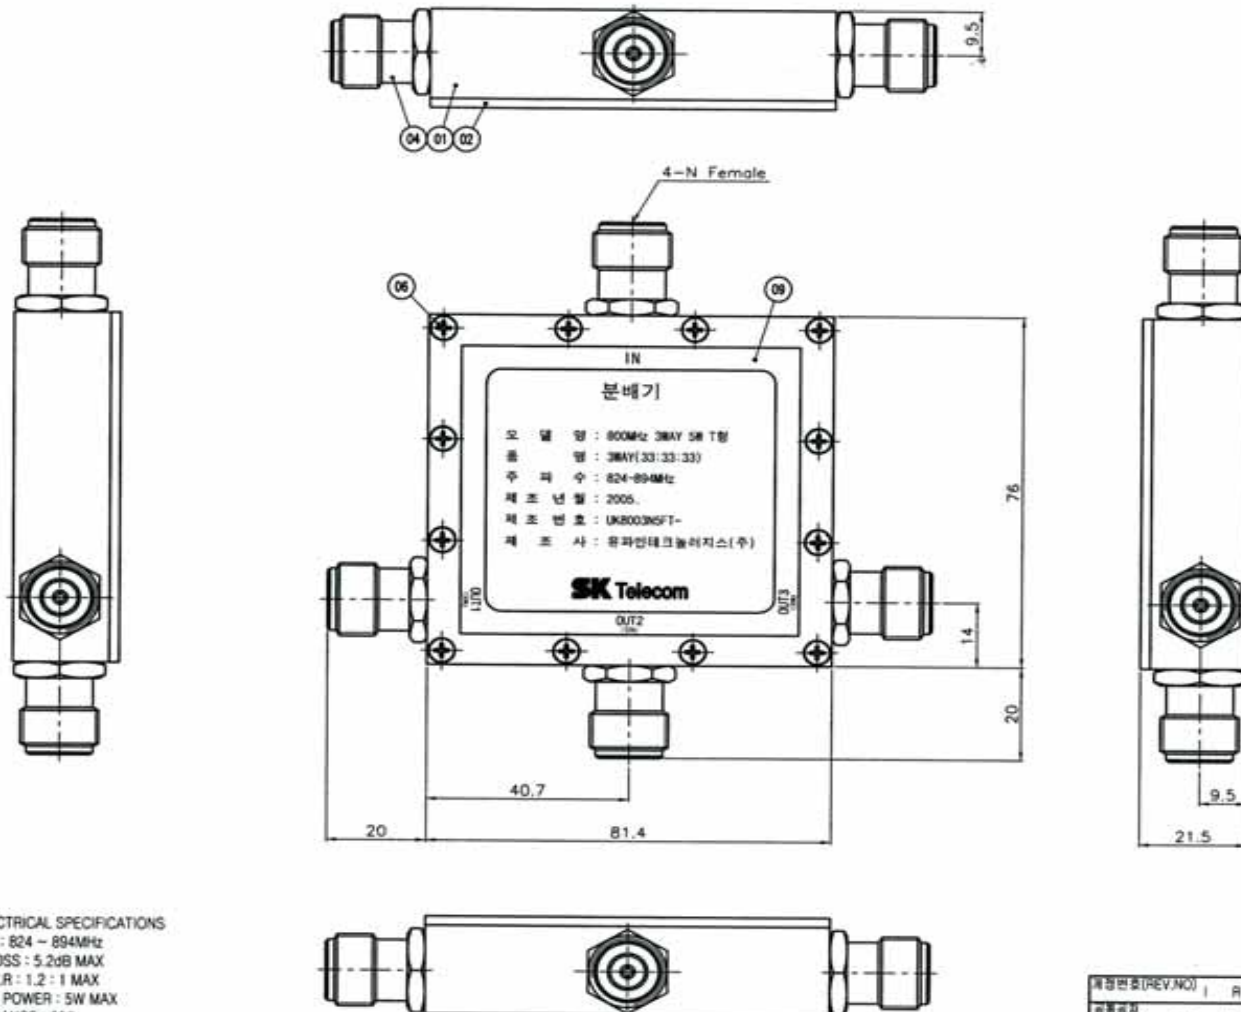



수 정 내 용				
부호	내 용	수정자	승인자	날 월 일



• ELECTRICAL SPECIFICATIONS
 FREQ : 824 ~ 894MHz
 INS LOSS : 5.2dB MAX
 V.S.W.R : 1.2 : 1 MAX
 INPUT POWER : 5W MAX
 IMPEDANCE : 50Ω
 DIVISION RATIO : 1 : 1 : 1
 IMD : -140dBc MAX
 ISOLATION : 25dB MIN

01	LABEL	1	전부 해당	9.000	DLA00059-9/1
02	고정용	4	M8-80	Nickel Plate	31042
03	PCB BOLT	9	SUS		RS50423-6
04	CASE BOLT	12	SUS		RS50423-6
05	CASNET	1	SILICONE		CN014
06	N-CONNECTOR	4			K3G-501-001
07	PCB	1	무-2.5, 35mm		70318
08	COVER	1	A 3052 104	유파인테크놀로지스	W7907
09	CASE	1	A 6060 16	유파인테크놀로지스	XT219
품명		용역명		수정	과장
년월일		2005. 2. 2		표면처리 비고	
수인		 김민준		 KJ COMTECH CO., LTD.	
검도		 김민준		KJ & MICROELECTRONICS TEL: 02-327-3401 (Ext. 601) FAX: 02-327-3447 (Ext. 602)	
검도		 김민준		POWER DIVIDER 3WAY(824~894MHz)	
검도		 김민준		도면 K526-323-025	
작성부서		부품 연구소		1	
작도 1/1		단위 mm		1	
		A3		1	
				1	
				1	