



REVISION		
REV	DESCRIPTION	DATE
1	업체 요구로 인한 BAR CODE 추가(설번200810-0030)	2008.10.31.

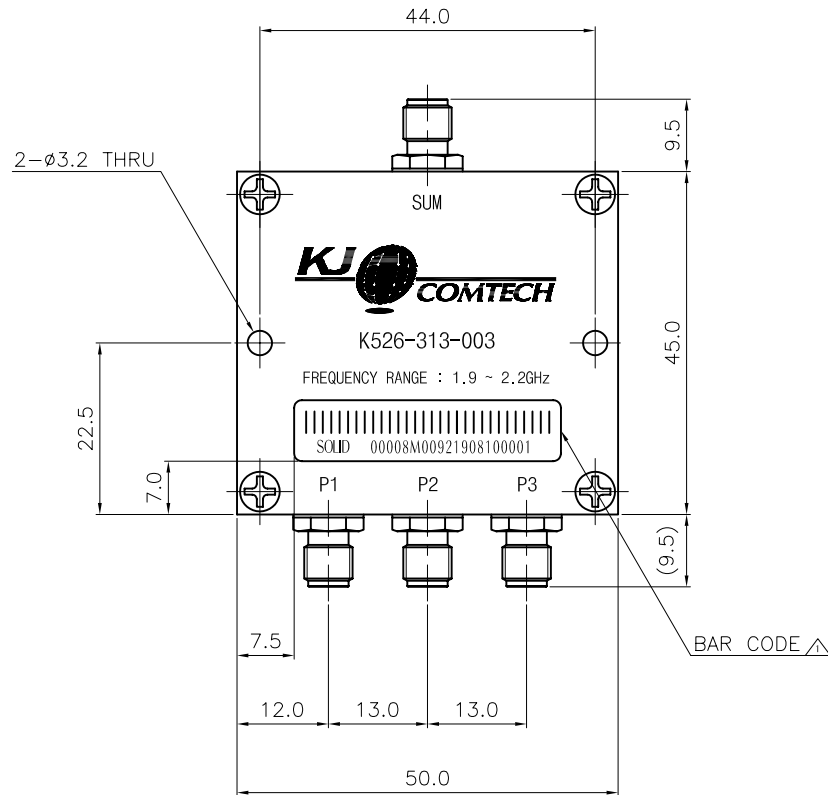

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Insertion Loss (Max.) : 5.07dB
V.S.W.R (Max.) : 1.22 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

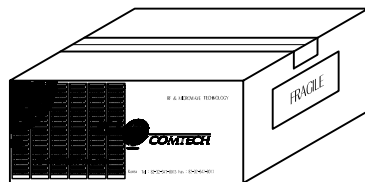

* 바코드 라벨 부착

1. 제품 : 상단 도면을 참조하여 해당 위치에 부착
2. BOX : 좌측 도면을 참조하여 BOX의 앞단 좌측 부터 부착

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE 2005. 12. 13.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY		S.W.LEE				
	Angle	± 1°		CHECKED BY	J.H.YOUN	TITLE	3WAY POWER DIVIDER	
MATERIAL		A6061 T6		DRAWN BY	K.I.CHO			
FINISH	Yellow Chromate		SCALE	1/1	UNIT	mm		
					A4	DWG NO.	PD00144-7/2	
						SHEET	1	OF 1