

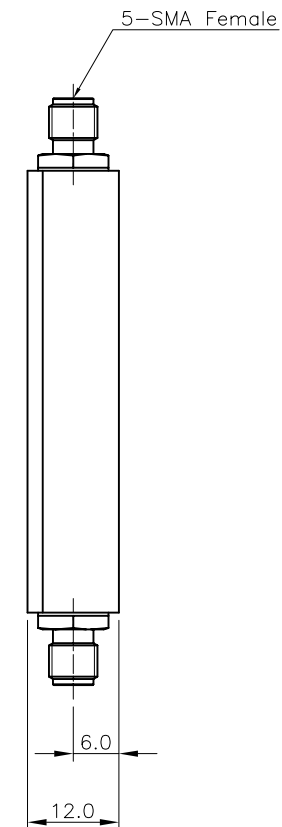


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	K.I.CHO	J.H.YOUN	2002.07.29.
A	업체 요청으로 인한 고정 TAP(M3) 추가 및 불필요한 홀(ø3.2) 제거	K.I.CHO	J.H.YOUN	2011.02.16.

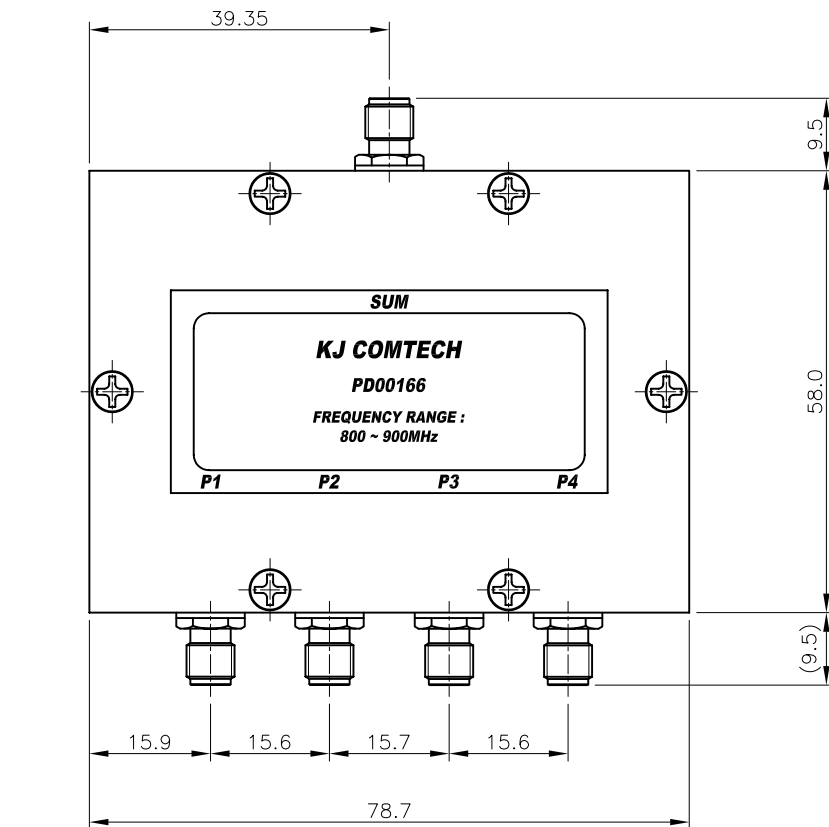

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 900.0MHz
Insertion Loss (Max.) : 6.52dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : Brass (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

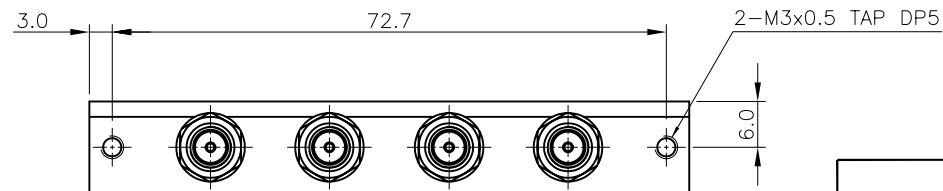

TOLERANCE	Decimal	DATE 2011. 02. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 4WAY POWER DIVIDER
	A6061 T6	DRAWN BY	K.I.CHO	
FINISH	White Chromate	SCALE	1/1	A4 DWG NO. PD00166-7/2 REVISION A SHEET 1 of 1
		UNIT	mm	