
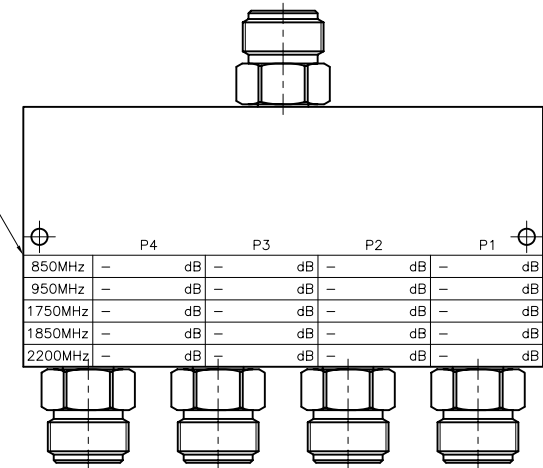
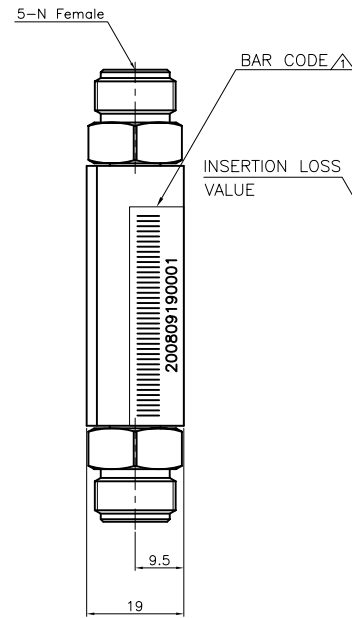


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2008.10.06.
DR	온도 특성 추가	2009.08.17.

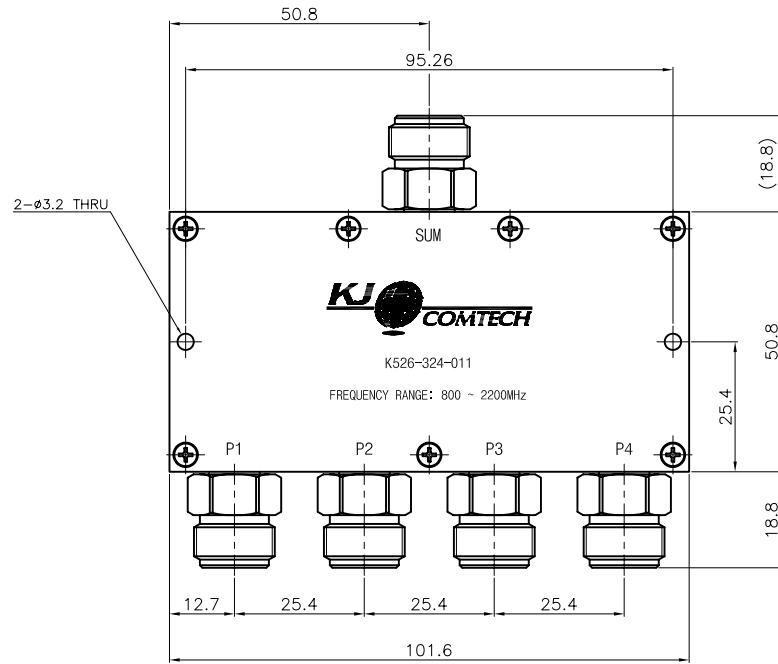

* ELECTRICAL SPECIFICATIONS
Frequency Range : 800.0 ~ 2200.0MHz
Insertion Loss (Max.) : 6.82dB
V.S.W.R (Max.) : Input 1.35 : 1,
Output 1.25 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Phase Unbalance (Max.) : 4.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω
Operation Temperature : -30~+70℃

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

TOLERANCE	Decimal ±0.3	DATE 2009. 08. 17.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL A6061 T6	CHECKED BY M.H.LEE	TITLE 4WAY POWER DIVIDER			
	DRAWN BY K.I.CHO				
FINISH White Chromate	SCALE 1/1	UNIT mm	 A3	DWG NO. PD00176-7/1	
				REVISION I R	SHEET 1 of 1