

1




2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

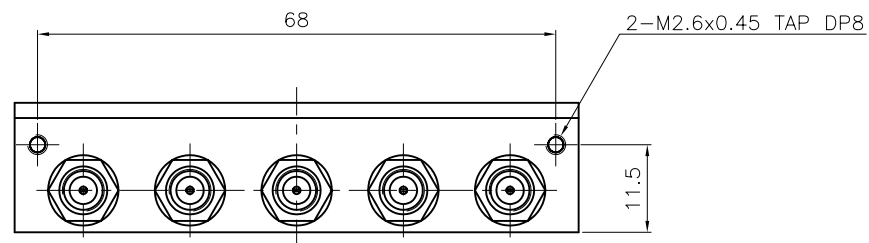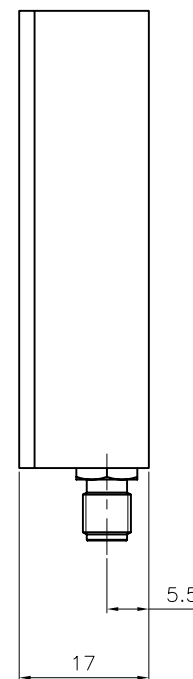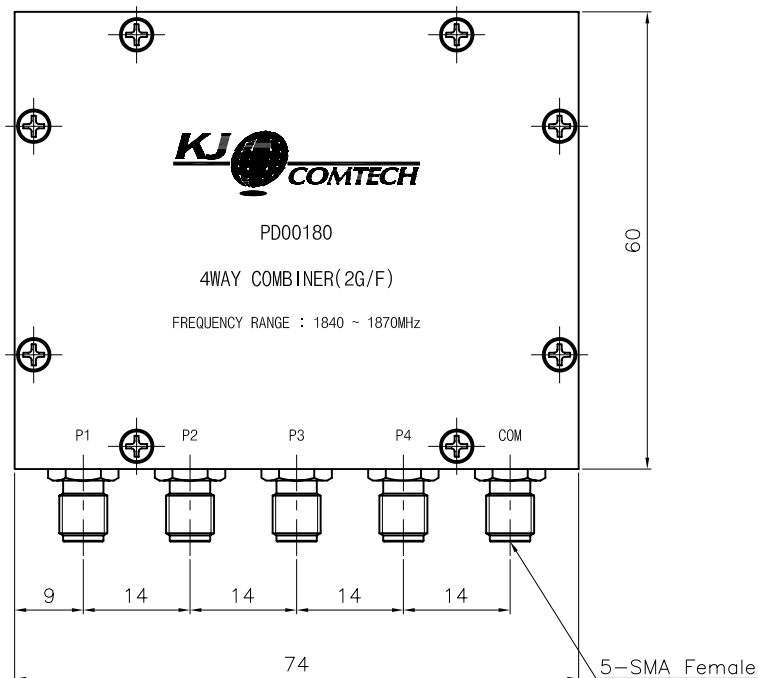

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1840.0 ~ 1870.0MHz

Insertion Loss (Max.) : 7.0dB

Ripple (Max.) : 0.2dB

V.S.W.R (Max.) : 1.3 : 1

Isolation (Min.) : 20.0dB

(@1840~1870MHz 에서 One port open시 특성 유지)

Power Handling (Max.) : 0.1mW

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	± 0.3		DATE		2004. 7. 15.	KJ  COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	TITLE 4WAY POWER DIVIDER		
	Angle	± 1°		APPROVED BY						
			CHECKED BY							
MATERIAL		A6061 T6		DRAWN BY			A4	DWG NO. PD00180-7/1		
FINISH Yellow Chromate		SCALE 1/1		UNIT mm				SHEET 1 OF 1		