

4- ϕ 3.4 THRU



2- ϕ 4.4 THRU

5-N Female



PD00183

FREQUENCY RANGE : 1885 ~ 2170MHz

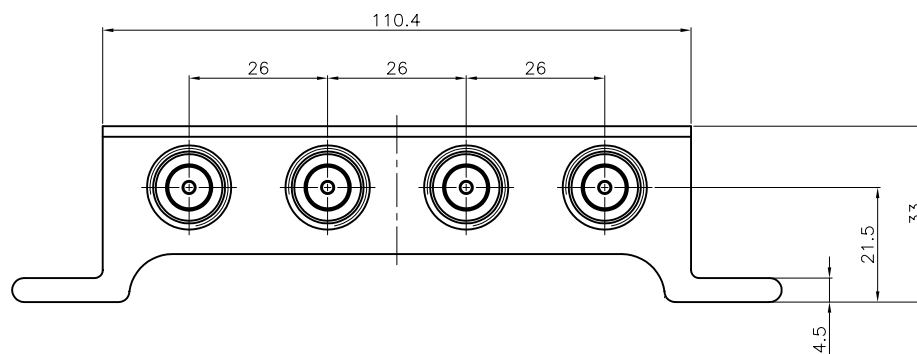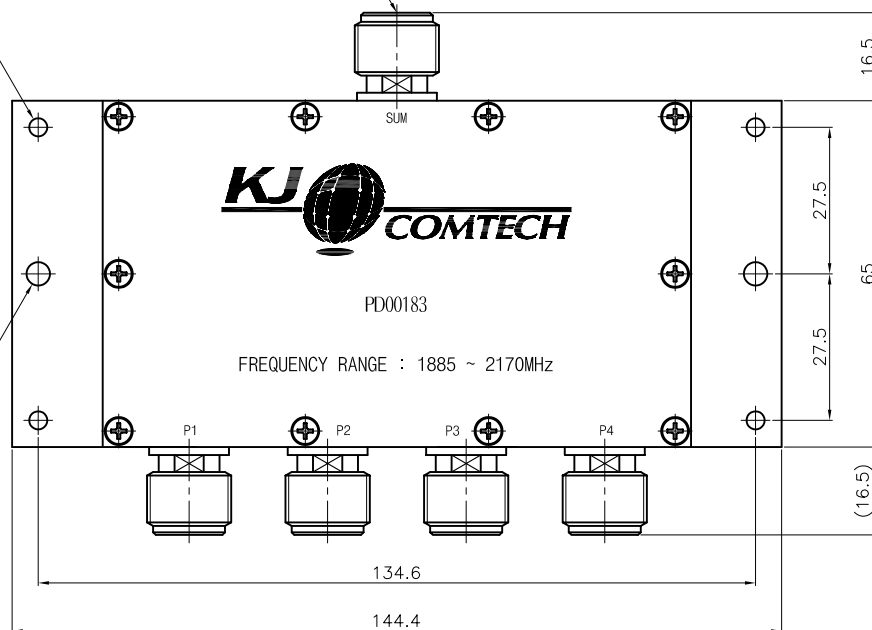

REVISION

REV	DESCRIPTION	DATE
△		
△		

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1885.0 ~ 2170.0MHz

Insertion Loss (Max.) : 6.7dB

V.S.W.R (Max.) : 1.2 : 1

Isolation (Min.) : 25.0dB

Power Handling (Max.) : 1.0W

Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			2003. 10. 28.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle	APPROVED BY								
	± 1°	CHECKED BY								
MATERIAL		DRAWN BY				TITLE				
A6061 T6						4WAY POWER DIVIDER				
FINISH		SCALE	UNIT			A3	DWG NO. PD00183-7/1			
Yellow Chromate		1/1	mm				SHEET 1 OF 1			