

1



2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

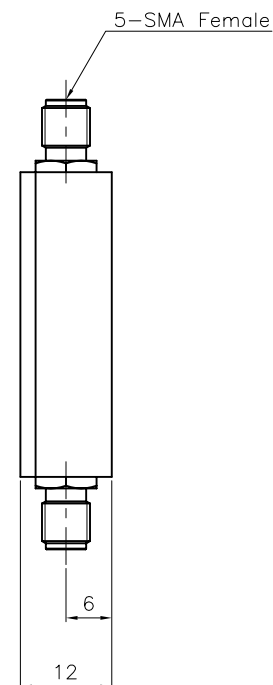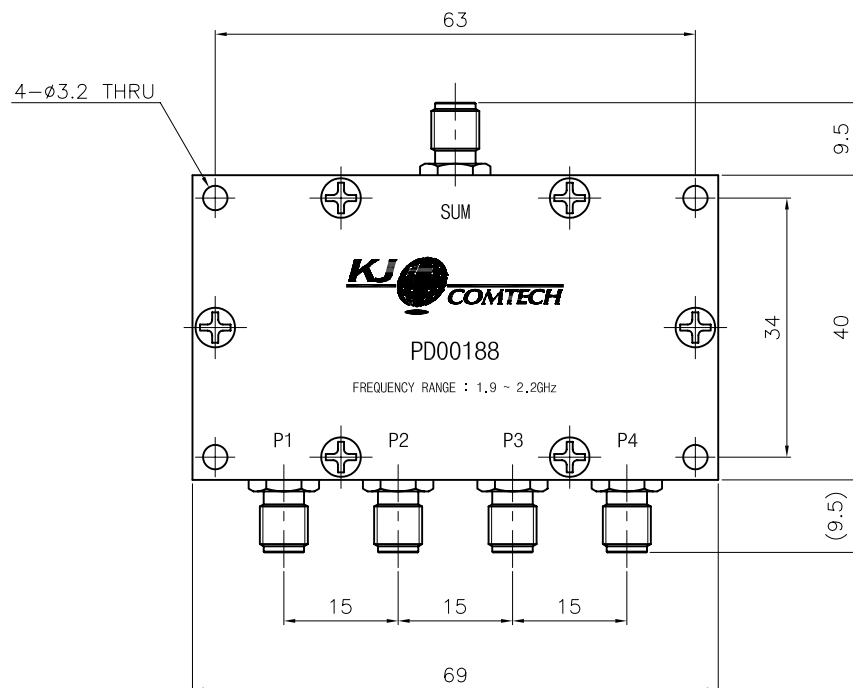

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Insertion Loss (Max.) : 6.52dB
V.S.W.R (Max.) : 1.22 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.3dB
Phase Unbalance (Max.) : 4.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	± 0.3		DATE		2003. 2. 4.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.	TITLE <i>4WAY POWER DIVIDER</i>			
	Angle	± 1°		APPROVED BY							
			CHECKED BY								
MATERIAL		A6061 T6		DRAWN BY							
FINISH		Yellow Chromate		SCALE	UNIT		A4	DWG NO.	PD00188-7/1		
		1/1		mm		SHEET		1	OF	1	