
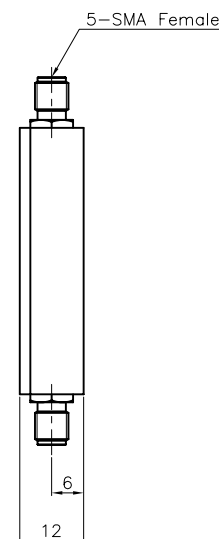


REVISION		
REV	DESCRIPTION	DATE
△		
△		

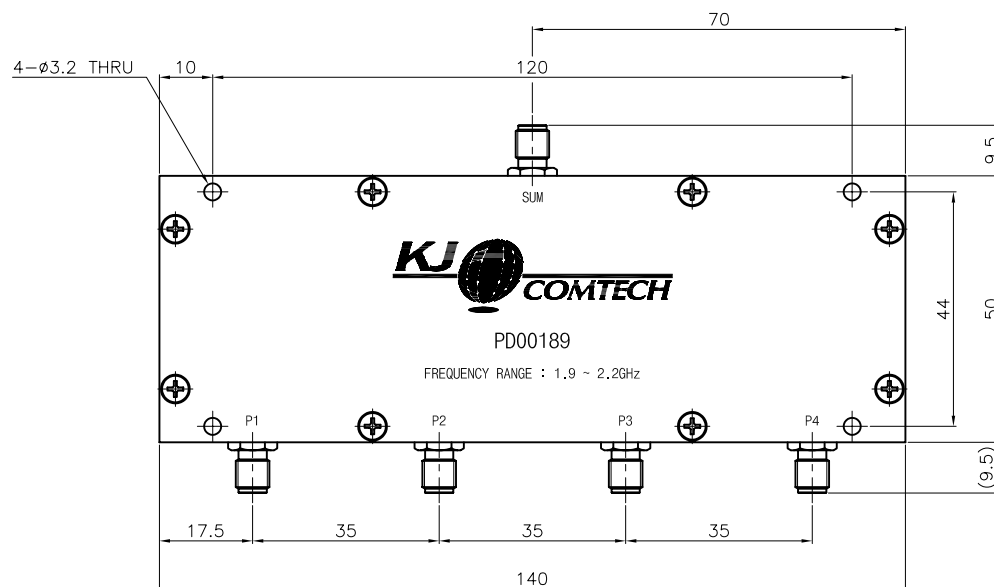

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1900.0 ~ 2200.0MHz

Insertion Loss (Max.) : 6.52dB

V.S.W.R (Max.) : 1.22 : 1

Isolation (Min.) : 20.0dB

Amplitude Unbalance (Max.) : 0.3dB

Phase Unbalance (Max.) : 4.0°

Power Handling (Max.) : 1.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2002. 5. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	± 0.3			APPROVED BY						
	Angle									
				CHECKED BY				TITLE		
MATERIAL				DRAWN BY				4WAY POWER DIVIDER		
A6061 T6										
FINISH		SCALE		UNIT		A3		DWG NO. PD00189-7/1		
Yellow Chromate		1/1		mm				SHEET 1 OF 1		
										