
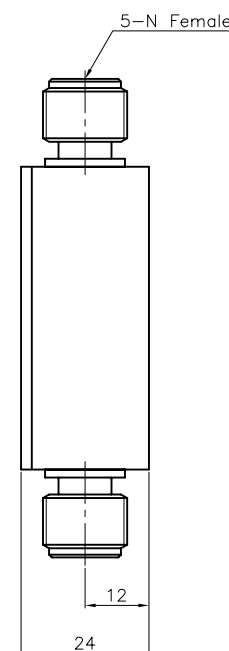


REVISION		
REV	DESCRIPTION	DATE
△		
△		

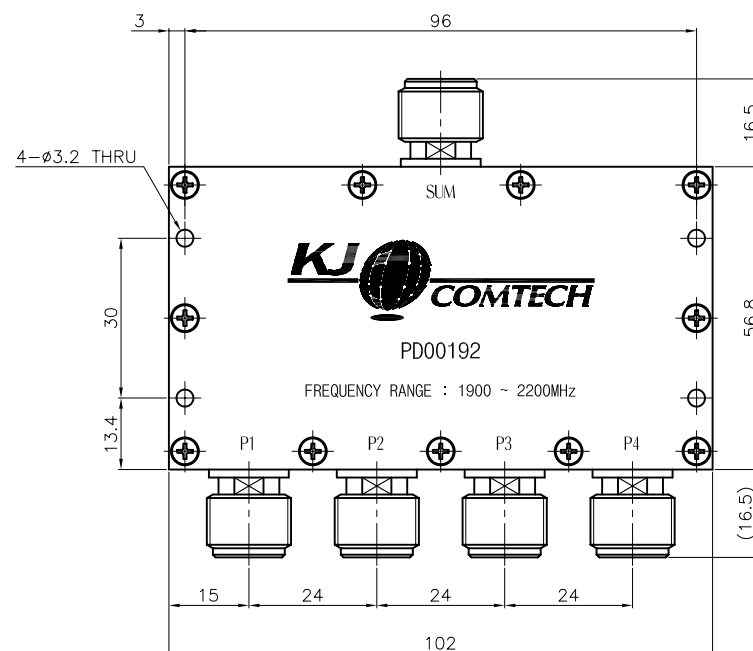

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1900.0 ~ 2200.0MHz
Insertion Loss (Max.) : 6.37dB
V.S.W.R (Max.) : 1.22 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.2dB
Phase Unbalance (Max.) : 3.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE				 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	2002. 5. 15.							
	Angle	APPROVED BY							
	± 1°	CHECKED BY			TITLE				
MATERIAL		A6061 T6		DRAWN BY		4WAY POWER DIVIDER			
FINISH		SCALE		UNIT		A3	DWG NO. PD00192-7/1		
Yellow Chromate		1/1		mm			SHEET 1 OF 1		