
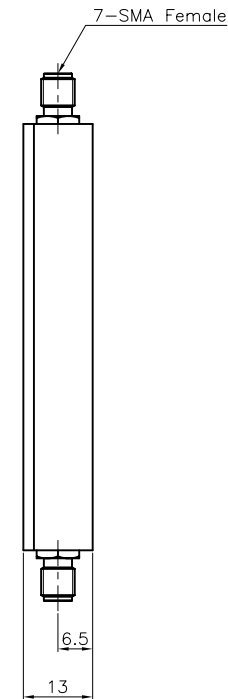


REVISION		
REV	DESCRIPTION	DATE
△		
△		

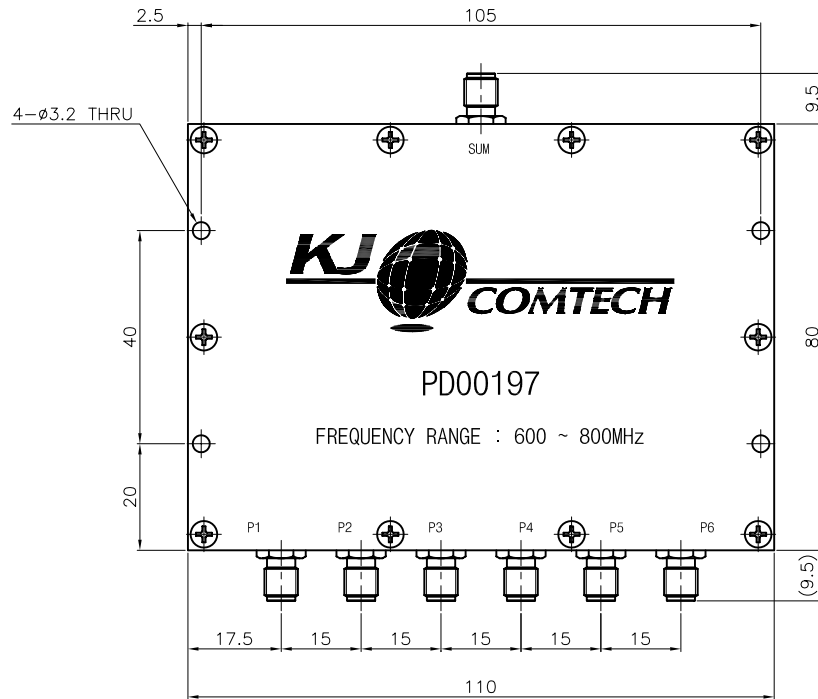

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 600.0 ~ 800.0MHz
Insertion Loss (Max.) : 8.28dB
Input V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.3dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2001. 7. 28.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3			APPROVED BY						
	Angle					CHECKED BY				
MATERIAL				DRAWN BY			TITLE			
A6061 T6						6WAY POWER DIVIDER				
FINISH		SCALE		UNIT		A3				
Yellow Chromate		1/1		mm						
						DWG NO. PD00197-7/1				
						SHEET 1 OF 1				