
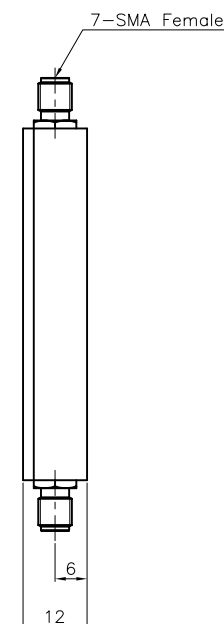


REVISION		
REV	DESCRIPTION	DATE
△		
△		

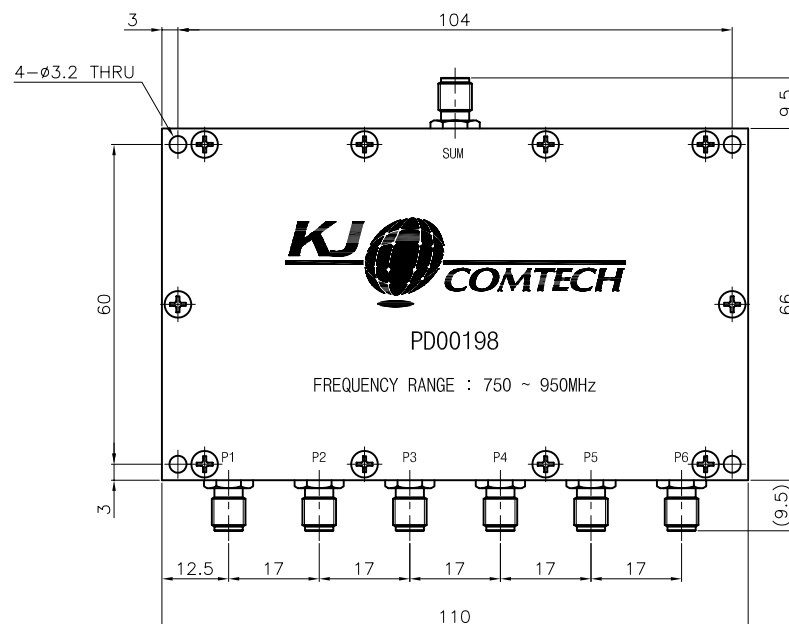

* ELECTRICAL SPECIFICATIONS
Frequency Range : 750.0 ~ 950.0MHz
Insertion Loss (Max.) : 8.28dB
Input V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.3dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION	I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal		DATE		2000. 6. 10.		 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	± 0.3		APPROVED BY						
	Angle		CHECKED BY						
MATERIAL			DRAWN BY			TITLE			
A6061 T6						6WAY POWER DIVIDER			
FINISH			SCALE	UNIT	A3	DWG NO.		PD00198-7/1	
Yellow Chromate			1/1	mm		SHEET		1 OF 1	