
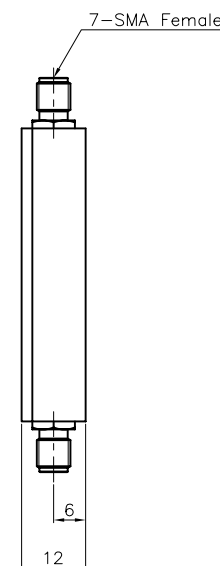


REVISION		
REV	DESCRIPTION	DATE
△		
△		

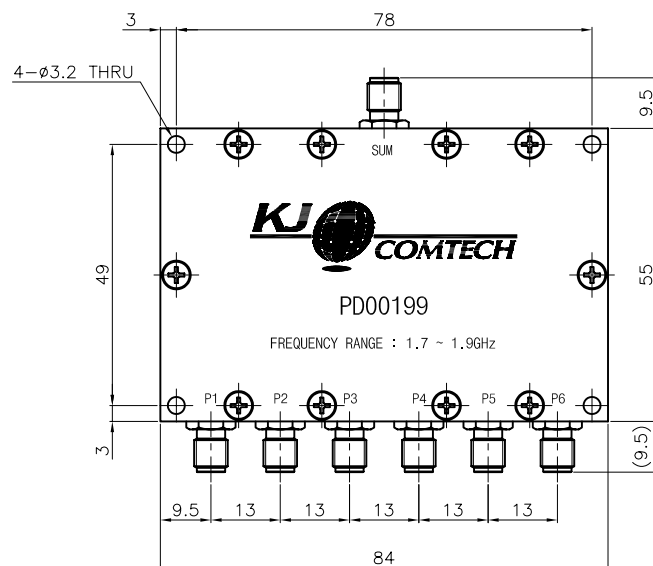

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 1700.0 ~ 1900.0MHz
 Insertion Loss (Max.) : 8.28dB
 Input V.S.W.R (Max.) : 1.25 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.3dB
 Phase Unbalance (Max.) : 5.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3			2002. 7. 19.					
	Angle			APPROVED BY					
		± 1°		CHECKED BY		TITLE			
MATERIAL				DRAWN BY		6WAY POWER DIVIDER			
A6061 T6									
FINISH		SCALE		UNIT		A3			
Yellow Chromate		1/1		mm					
						DWG NO. PD00199-7/1			
						SHEET 1 OF 1			