
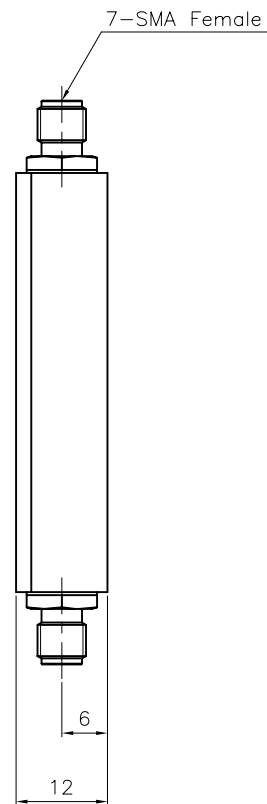


REVISION		
REV	DESCRIPTION	DATE
△		
△		

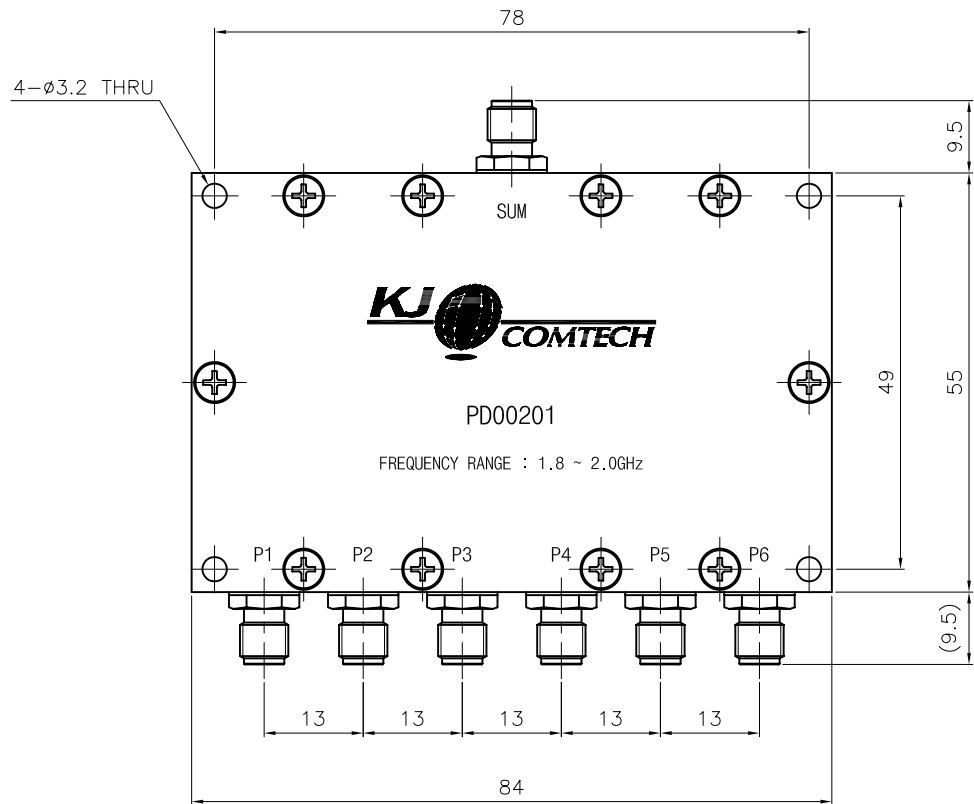

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1800.0 ~ 2000.0MHz
 Insertion Loss (Max.) : 8.3dB
 V.S.W.R (Max.) : 1.25 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.3dB
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE			2002. 7. 19.		 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.3	APPROVED BY								
	Angle									
MATERIAL	A6061 T6			CHECKED BY		TITLE		6WAY POWER DIVIDER		
				DRAWN BY						
FINISH		SCALE		UNIT		A4	DWG NO.		PD00201-7/1	
Yellow Chromate		1/1		mm			SHEET		1	OF