
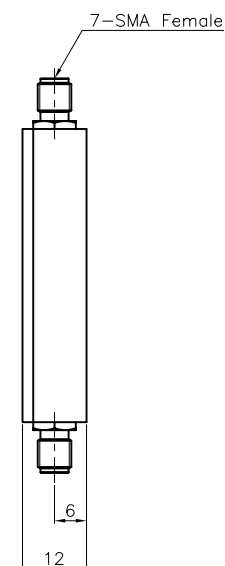


REVISION		
REV	DESCRIPTION	DATE
△		
△		

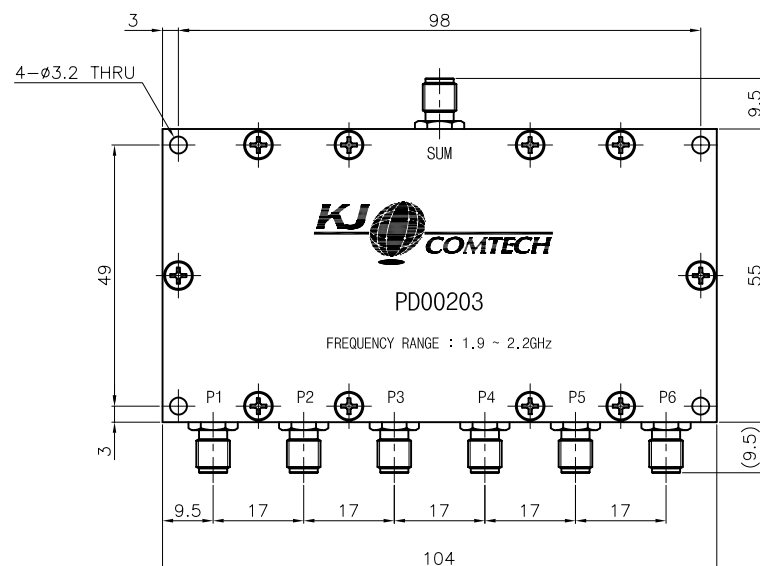

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1930.0 ~ 2170.0MHz
Insertion Loss (Max.) : 8.28dB
Input V.S.W.R (Max.) : 1.25 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.3dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION	I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS					
TOLERANCE	Decimal	± 0.3	DATE	2002. 12. 20.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017							
	Angle	± 1°	APPROVED BY										
			CHECKED BY										
MATERIAL	A6061 T6		DRAWN BY		TITLE	6WAY POWER DIVIDER							
FINISH	Yellow Chromate		SCALE	1/1	UNIT	mm			A3	DWG NO.	PD00203-7/1		
										SHEET	1	OF	1