
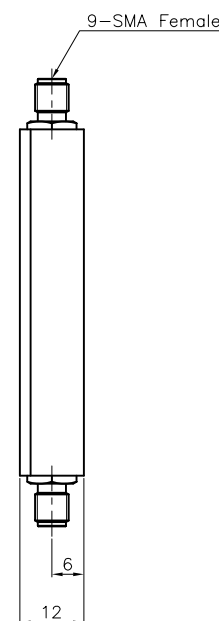


REVISION		
REV	DESCRIPTION	DATE
△		
△		

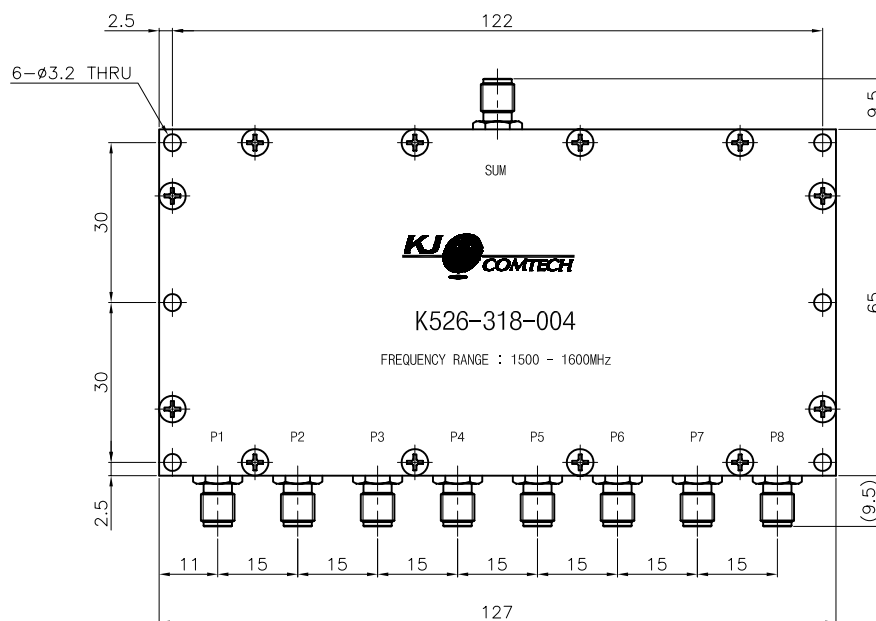

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1500.0 ~ 1600.0MHz

Insertion Loss (Max.) : 9.63dB

Input V.S.W.R (Max.) : 1.22 : 1

Isolation (Min.) : 20.0dB

Amplitude Unbalance (Max.) : 0.3dB

Power Handling (Max.) : 1.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal			DATE		1999. 12. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3			APPROVED BY							
	Angle										
		± 1°		CHECKED BY				TITLE			
MATERIAL				DRAWN BY				8WAY POWER DIVIDER			
A6061 T6											
FINISH		SCALE		UNIT		A3		DWG NO.			PD00213-7/1
Yellow Chromate		1/1		mm				SHEET		1	OF