
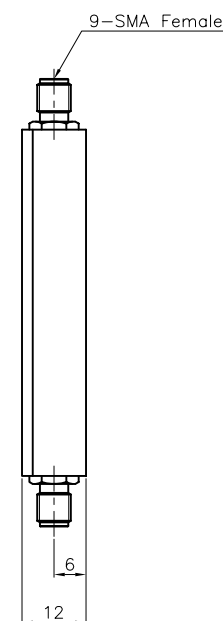


REVISION		
REV	DESCRIPTION	DATE
△		
△		

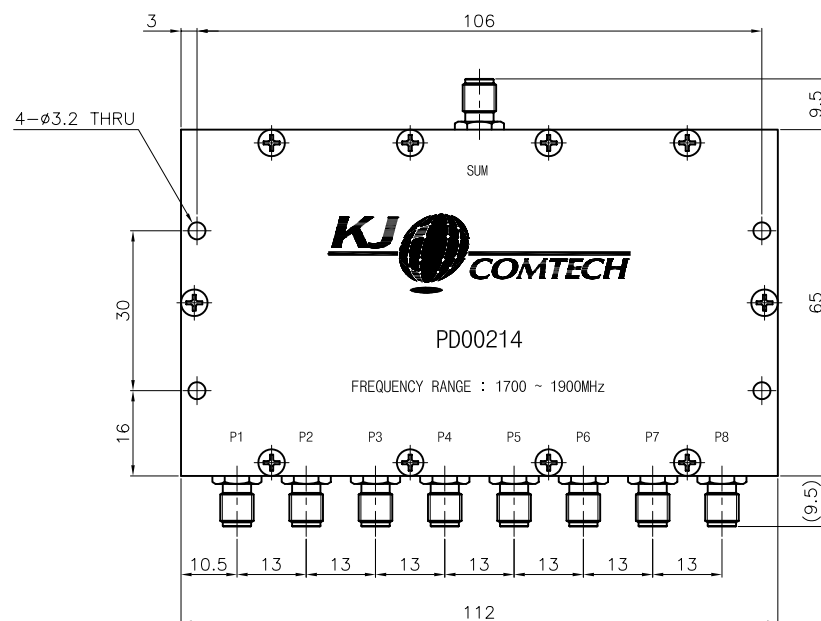

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 1700.0 ~ 1900.0MHz
Insertion Loss (Max.) : 9.63dB
Input V.S.W.R (Max.) : 1.22 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.3dB
Phase Unbalance (Max.) : 6.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal			DATE		2000. 6. 10.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	± 0.3			APPROVED BY						
	Angle			CHECKED BY						
MATERIAL		A6061 T6		DRAWN BY				TITLE <i>8WAY POWER DIVIDER</i>		
FINISH Yellow Chromate		SCALE 1/1		UNIT mm				A3		
								DWG NO. PD00214-7/1		
								SHEET 1 OF 1		