


REVISION		
REV	DESCRIPTION	DATE
△		
△		

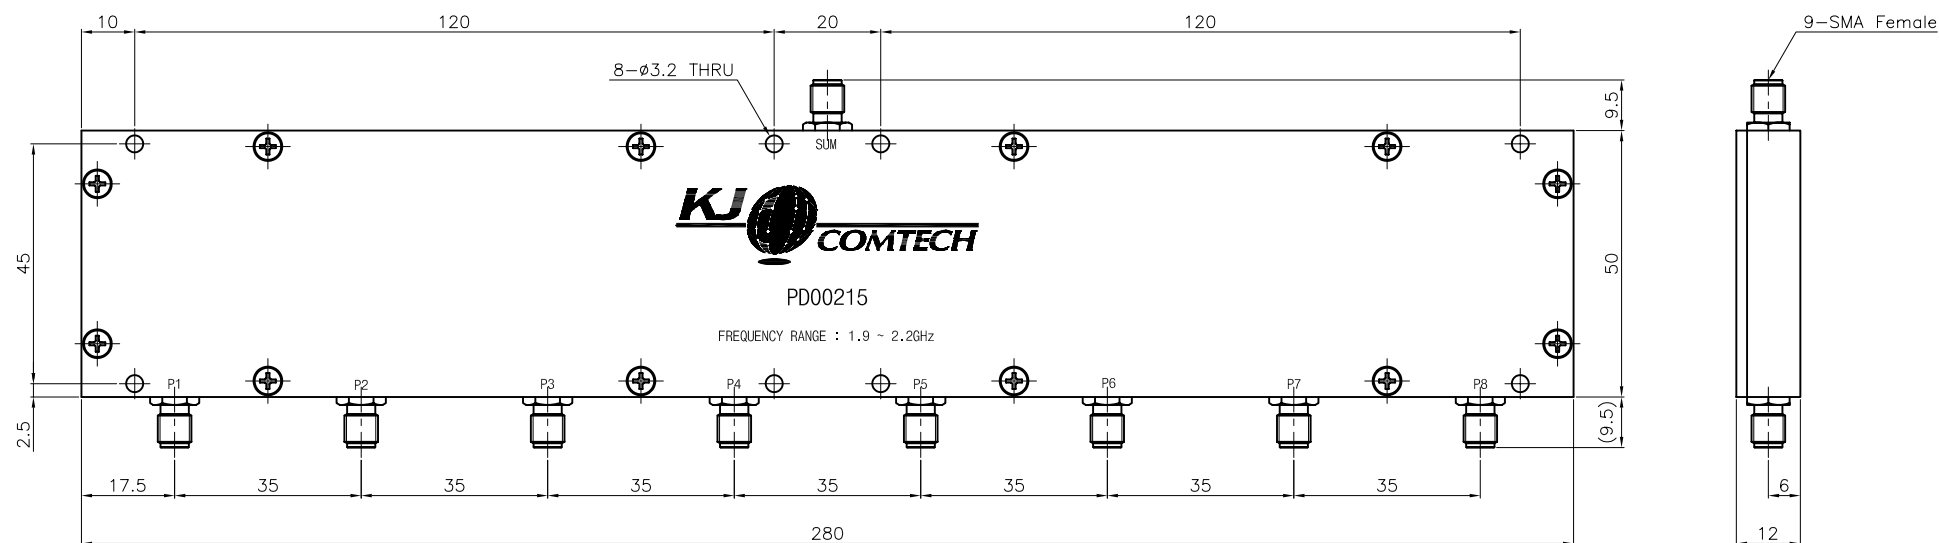

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1900.0 ~ 2200.0MHz
 Insertion Loss (Max.) : 9.63dB
 Input V.S.W.R (Max.) : 1.22 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.3dB
 Phase Unbalance (Max.) : 6.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION	I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	± 0.3	DATE		2002. 5. 29.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle		APPROVED BY						
	± 1°		CHECKED BY						
			DRAWN BY						
MATERIAL		A6061 T6				TITLE 8WAY POWER DIVIDER			
FINISH		Yellow Chromate		SCALE	1/1	UNIT	mm		
						A3	DWG NO.		PD00215-7/1
							SHEET		1 OF 1