


REVISION			DATE
REV	DESCRIPTION		
△			
△			

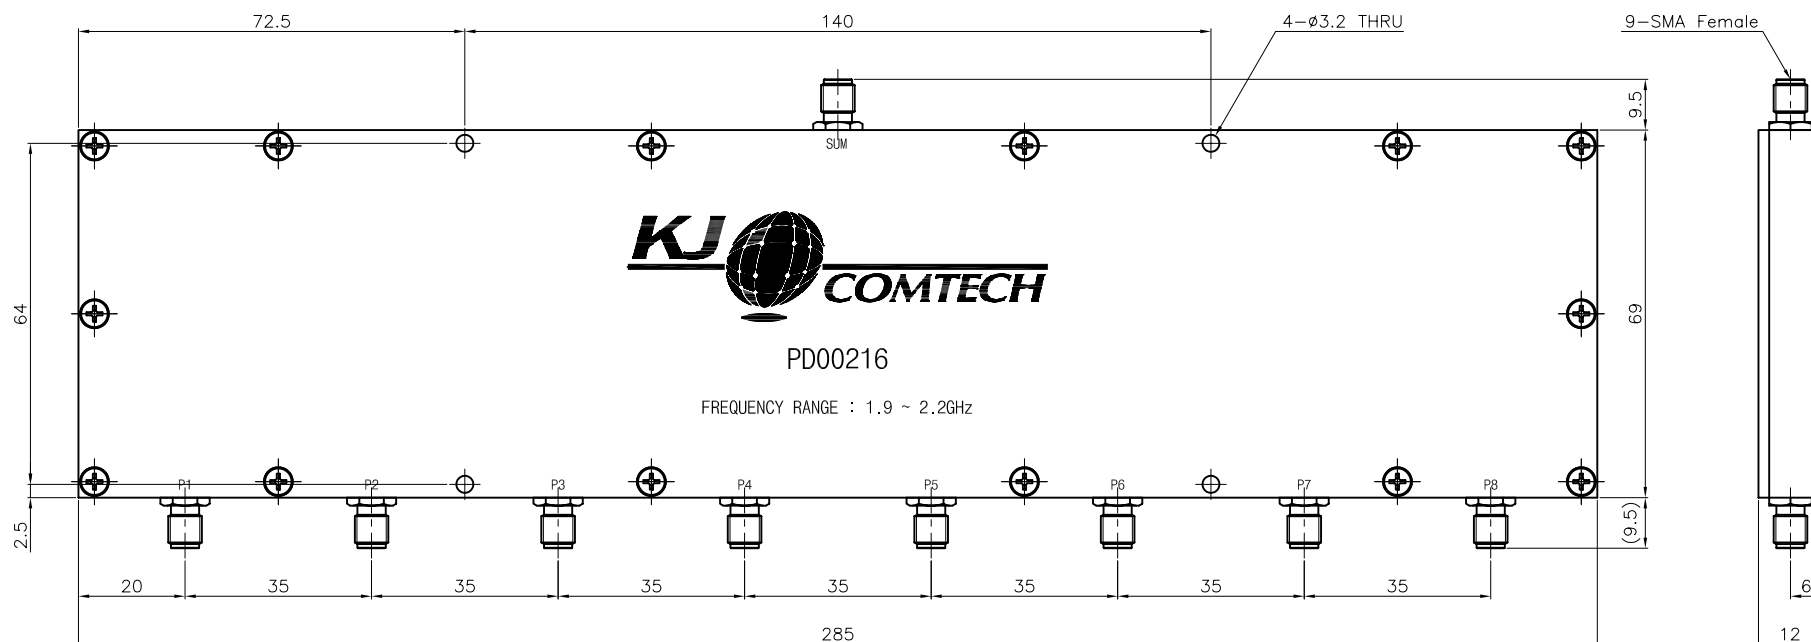

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1900.0 ~ 2200.0MHz
 Insertion Loss (Max.) : 9.63dB
 Input V.S.W.R (Max.) : 1.22 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.3dB
 Phase Unbalance (Max.) : 6.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION	I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS					
TOLERANCE	Decimal	± 0.3	DATE		2006. 1. 4.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017							
	Angle	± 1°	APPROVED BY											
	CHECKED BY													
MATERIAL		A6061 T6		DRAWN BY				TITLE						
FINISH		Yellow Chromate		SCALE		1/1	UNIT		mm		A3	DWG NO.	PD00216-7/1	
												SHEET	1	OF