


REVISION		
REV	DESCRIPTION	DATE
△		
△		

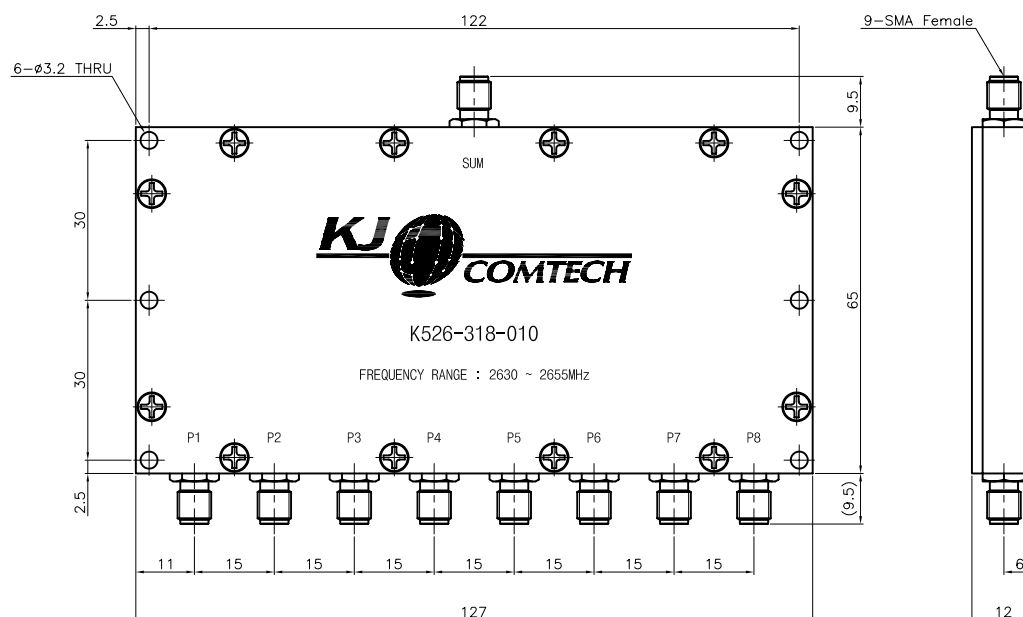

*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 2630.0 ~ 2655.0MHz
 Insertion Loss (Max.) : 9.70dB
 V.S.W.R (Max.) : 1.2 : 1
 Isolation (Min.) : 20.0dB
 Amplitude Unbalance (Max.) : 0.3dB
 Phase Unbalance (Max.) : 6.0°
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal			DATE		2004. 5. 4.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3			APPROVED BY							
	Angle			CHECKED BY							
MATERIAL				DRAWN BY				TITLE			
A6061 T6								8WAY POWER DIVIDER			
FINISH		SCALE		UNIT		A3		DWG NO.			PD00221-7/1
Yellow Chromate		1/1		mm				SHEET		1	OF
											