


REVISION		
REV	DESCRIPTION	DATE
IR	최초 개정	2006.07.13.
A	업체 요구로 인한 BAR CODE 추가(설번200810-0030)	2008.11.04.

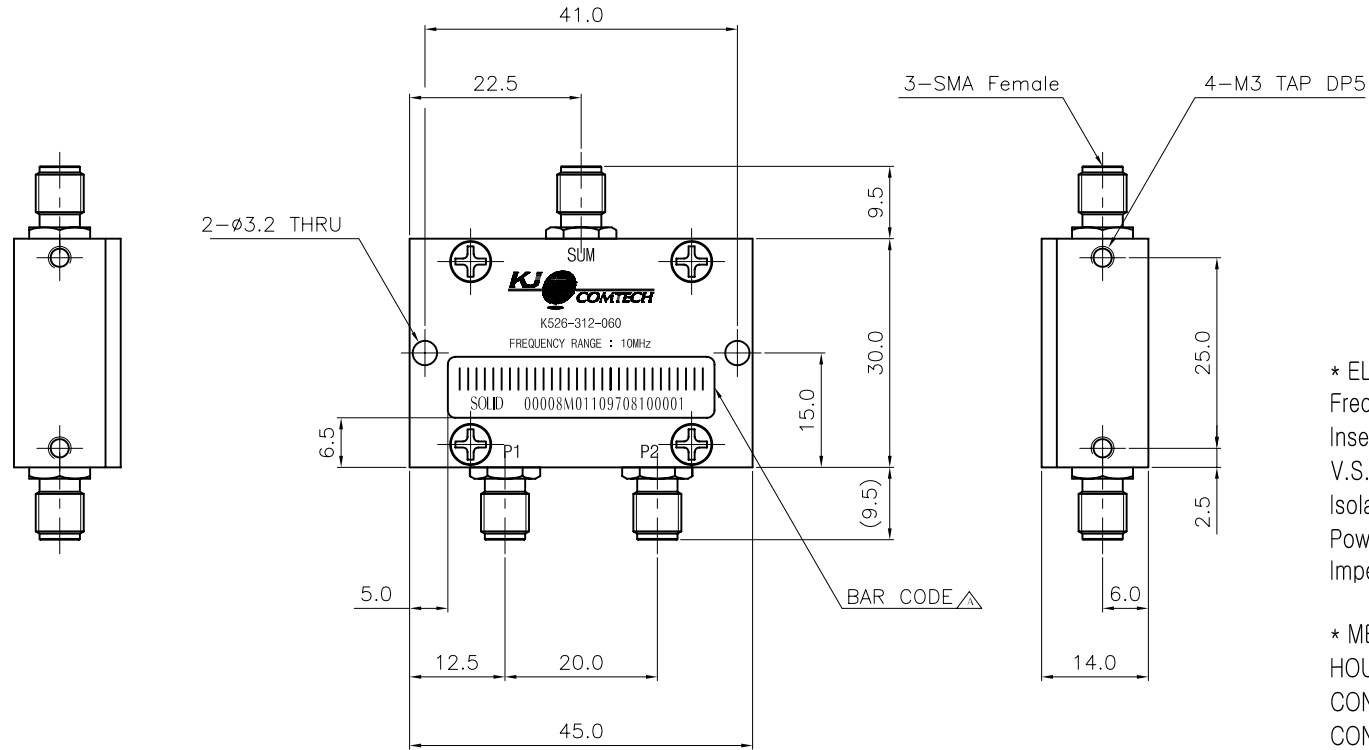


*** ELECTRICAL SPECIFICATIONS**

Frequency Range : 10.0MHz
Insertion Loss (Max.) : 3.30dB
V.S.W.R (Max.) : 1.20 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

*** MECHANICAL SPECIFICATIONS**

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

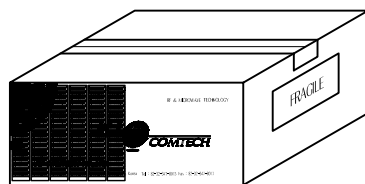

*** 바코드 라벨 부착**

1. 제품 : 상단 도면을 참조하여 해당 위치에 부착
2. BOX : 좌측 도면을 참조하여 BOX의 앞단 좌측 부터 부착

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal ± 0.3	DATE		2008. 11. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ± 1°	APPROVED BY		S.W.LEE				
MATERIAL	A6061 T6	CHECKED BY		J.H.YOUN		TITLE 2WAY POWER DIVIDER		
		DRAWN BY		K.I.CHO				
FINISH Yellow Chromate	SCALE 1/1	UNIT mm		A4	DWG NO. PD00228-7/2			
					SHEET 1 OF 1			