
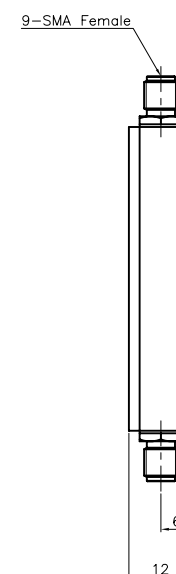


REVISION		
REV	DESCRIPTION	DATE
△		
△		

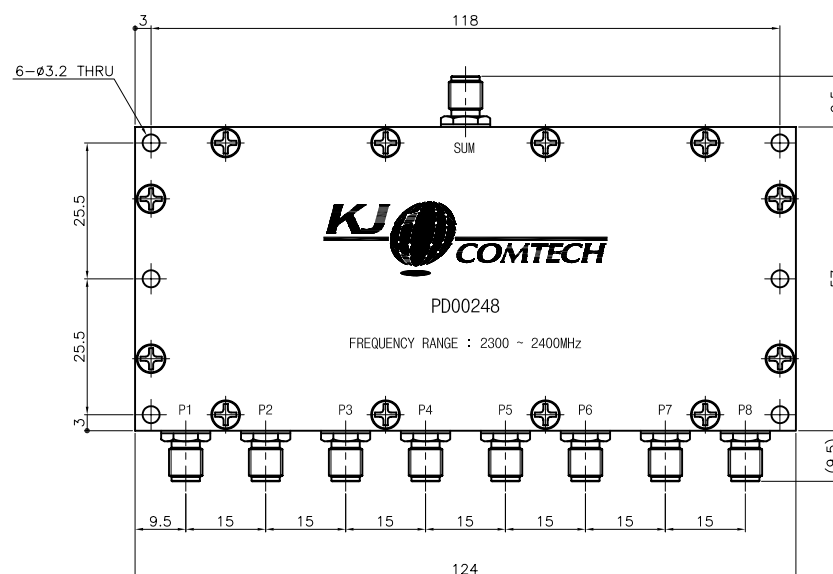

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2300.0 ~ 2400.0MHz
Insertion Loss (Max.) : 9.70dB
V.S.W.R (Max.) : 1.22 : 1
Isolation (Min.) : 20.0dB
Amplitude Unbalance (Max.) : 0.3dB
Phase Unbalance (Max.) : 6.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	DATE				 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
	± 0.3	2008. 1. 3.								
	Angle	APPROVED BY								
MATERIAL	± 1°	CHECKED BY			TITLE 8WAY POWER DIVIDER					
	A6061 T6	DRAWN BY								
	FINISH	SCALE	UNIT							
White Chromate	1/1	mm								
						A3	DWG NO.	PD00248-7/1		
							SHEET	1	OF	1