

1



2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

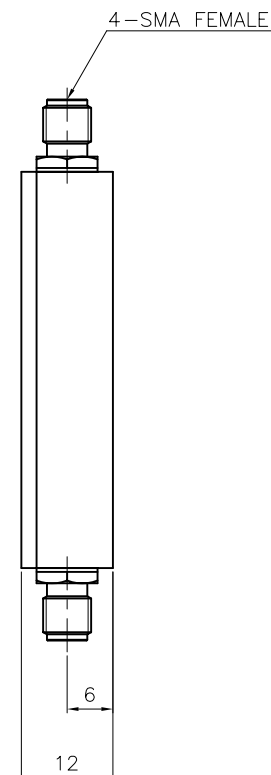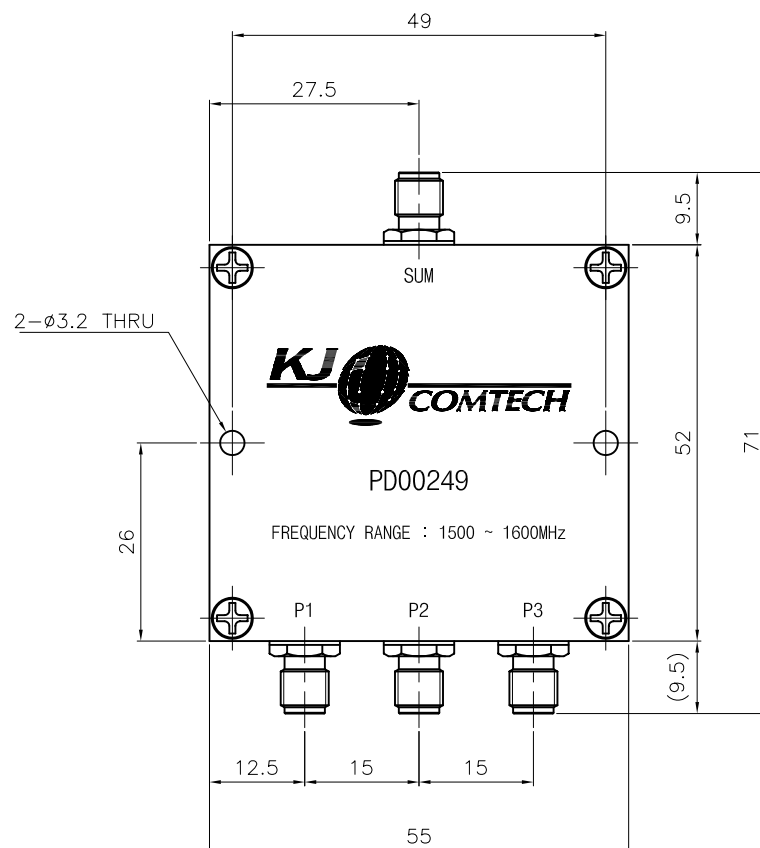

* ELECTRICAL SPECIFICATIONS
Frequency Range : 1500.0 ~ 1600.0MHz
Insertion Loss (Max.) : 5.07dB
V.S.W.R (Max.) : 1.20 : 1
Isolation (Min.) : 20.0dB
Phase Unbalance (Max.) : 3.0°
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS			
TOLERANCE	Decimal	± 0.3		DATE		2008. 1. 8.	 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017					
	Angle	± 1°		APPROVED BY									
			CHECKED BY										
MATERIAL		A6061 T6		DRAWN BY			TITLE 3WAY POWER DIVIDER						
FINISH		White Chromate		SCALE	1/1	UNIT	mm		A4	DWG NO.	PD00249-7/1		
										SHEET	1	OF	1